


SERVICE MANUAL

INTEGRATED STEREO AMPLIFIER

SANSUI AU-9900/11000

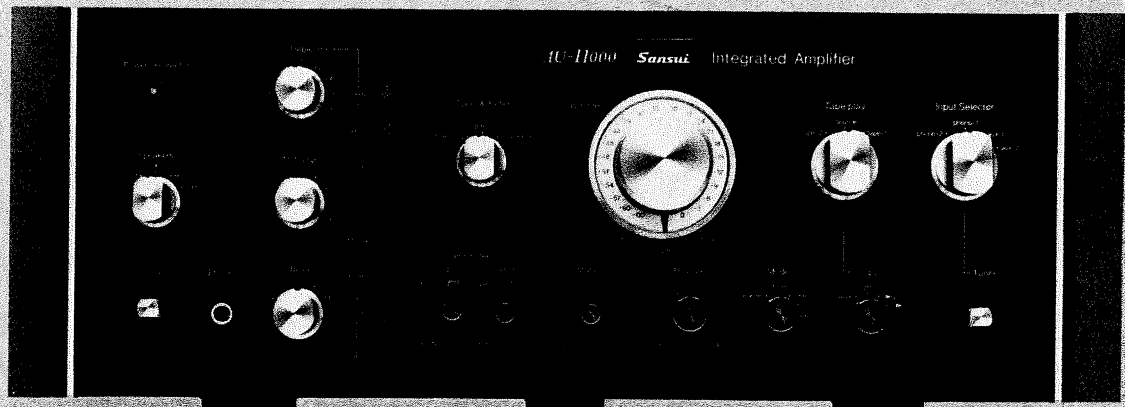

Sansui

SANSUI ELECTRIC CO., LTD.

This service manual is designed for service engineers to repair, adjust, maintain and order the replacement parts of the AU-9900 and AU-11000 correctly.

When ordering the parts, use the stock number and parts name specifically referring to the Parts Locations & Parts Lists.

For general usage and maintenance of the unit, please refer to the Operating Instructions attached with the unit.

TABLE OF CONTENTS

<u>Section</u>	<u>Title</u>	<u>Page</u>
1.	SPECIFICATIONS	2
2.	BLOCK DIAGRAM	3
3.	ADJUSTMENTS	3
4.	TROUBLESHOOTING	4
4-1.	Troubleshooting Chart	4, 5
4-2.	Operation Block Diagram	6
5.	PARTS LOCATION AND PARTS LIST	7
5-1.	F-2566 Power Supply Circuit Board	7
5-2.	F-2568 Regulated Power Supply & Protector Circuit Board	7
5-3.	F-2567 Power Supply Circuit Board for Driver AMP.	8
5-4.	F-2582 Power Supply Circuit Board for Driver AMP.	8
5-5.	F-2570 Equalizer Circuit Board	9
5-6.	F-2569 Input Terminal & Switch Circuit Board	9
5-7.	F-2573 Filter & Accessory Circuit Board	9
5-8.	F-2574 Buffer AMP. Circuit Board	9
5-9.	F-2575 Tone Midrange Circuit Board	10
5-10.	F-2576 Tone Bass & Treble Circuit Board	10
5-11.	F-2581 Power AMP. (+) Circuit Board	11
5-12.	F-2581 Power AMP. (-) Circuit Board	11
5-13.	F-2571 Tape Copy & Tuner Switch Circuit Board	11
5-14.	F-2577 Tone Selector (Treble) Circuit Board	12
5-15.	F-2578 Tone Selector (Bass) Circuit Board	12
5-16.	F-2572 Tape Play Circuit Board	12
5-17.	F-2579 Pre-Main Switch Circuit Board	12
5-18.	F-2580 Driver AMP. Circuit Board	13
5-19.	F-2583 Driver AMP. Circuit Board	14
5-20.	Figures	15
5-21.	Other Parts (Front Side)	16
5-22.	Other Parts (Top & Bottom Side)	17
6.	SCHEMATIC DIAGRAM	18
6-1.	AU-9900 Pre AMP. Section	18
6-2.	AU-9900 Power AMP. Section	19
6-3.	AU-11000 Pre AMP. Section	20
6-4.	AU-11000 Power AMP. Section	21
6-5.	F-2582, F-2583	22
7.	PACKING LIST	back cover
8.	ACCESSORY PARTS LIST	back cover

1. SPECIFICATIONS

POWER OUTPUT

Min. RMS, both channels driven, from 20 to 20,000Hz, with no more than 0.08% total harmonic distortion

- ※AU-9900 { 80 watts per channel into 8 ohms
80 watts per channel into 4 ohms
- ※AU-11000 { 110 watts per channel into 8 ohms
110 watts per channel into 4 ohms

LOAD IMPEDANCE 4, 8 ohms (SYSTEM A or B)
8 ohms (SYSTEM A+B)

POWER BANDWIDTH 20 to 20,000Hz at or below rated min. RMS power output and total harmonic distortion

TOTAL HARMONIC DISTORTION less than 0.08% at or below rated min. RMS power output

INTERMODULATION DISTORTION (70Hz:7kHz=4:1 SMPTE method) less than 0.08%

FREQUENCY RESPONSE (at 1 watt) 10 to 50,000Hz ± 0 dB

DAMPING FACTOR approximately 80 at 8 ohms load

INPUT SENSITIVITY AND IMPEDANCE (1kHz, for rated power output)

PHONO-1 2, 4, 8 mV/30, 50, 100 kilo-ohms
(Max. input capability: 1,000 mV at 1kHz, less than 0.1% total harmonic distortion and PHONO-1 SENSITIVITY switch at 8 mV)

PHONO-2 2 mV/50 kilo-ohms
(Max. input capability: 300 mV at 1 kHz, less than 0.1% total harmonic distortion)

TUNER 130 mV/50 kilo-ohms

AUX-1, 2 130 mV/50 kilo-ohms

TAPE-1, 2 PLAY (pin jacks) 130 mV/50 kilo-ohms

TAPE-2 REC/PLAY (DIN socket) 130mV

MAIN IN 700 mV/100 kilo-ohms

OUTPUT LEVEL (1,000Hz)

TAPE-1, 2 REC (pin jacks) 130 mV

TAPE-2 REC/PLAY (DIN socket) 30 mV

PRE OUT 700 mV

CHANNEL SEPARATION (1 kHz, at rated power output)

PHONO-1, 2 better than 55dB

TUNER better than 60dB

AUX-1, 2 better than 60dB

TAPE-1, 2 PLAY better than 60dB

MAIN IN better than 70dB

HUM AND NOISE (IHF)

PHONO-1, 2 better than 65dB

TUNER better than 80dB

AUX-1, 2 better than 80dB

TAPE-1, 2 PLAY better than 80dB

MAIN IN better than 100dB

CONTROLS

BASS ± 10 dB (30Hz)

Tone selector (turnover frequency)

..... 150, 300, 600Hz

MIDRANGE ± 5 dB (1.5 kHz)

TREBLE ± 10 dB (20 kHz)

Tone selector (turnover frequency)

..... 2, 4, 8 kHz

LOW FILTER -3dB (20, 60Hz), 12dB/oct.

HIGH FILTER -3dB (7 kHz), 6dB/oct.

..... -3dB (12 kHz), 12dB/oct.

MUTING 0, -20dB

LEVEL SET 0, -10dB, -20dB

POWER REQUIREMENTS

POWER VOLTAGE 100, 120, 220, 240V 50/60Hz

120V (Usable 110~130V)

(for U.S.A. & Canada only)

POWER CONSUMPTION 180 watts (rated)

515 watts (max)

DEMENSIONS 460 mm (18 $\frac{1}{8}$ " W

160 mm (6 $\frac{5}{16}$ " H

373 mm (14 $\frac{13}{16}$ " D

※AU-9900

WEIGHT 17.9 kg (39.5 lbs) net

20.0 kg (44.1 lbs) packed


※AU-11000

WEIGHT 19.0 kg (41.9 lbs) net

21.1 kg (46.5 lbs) packed

* Design and specifications subject to change without notice for improvements.

2. BLOCK DIAGRAM

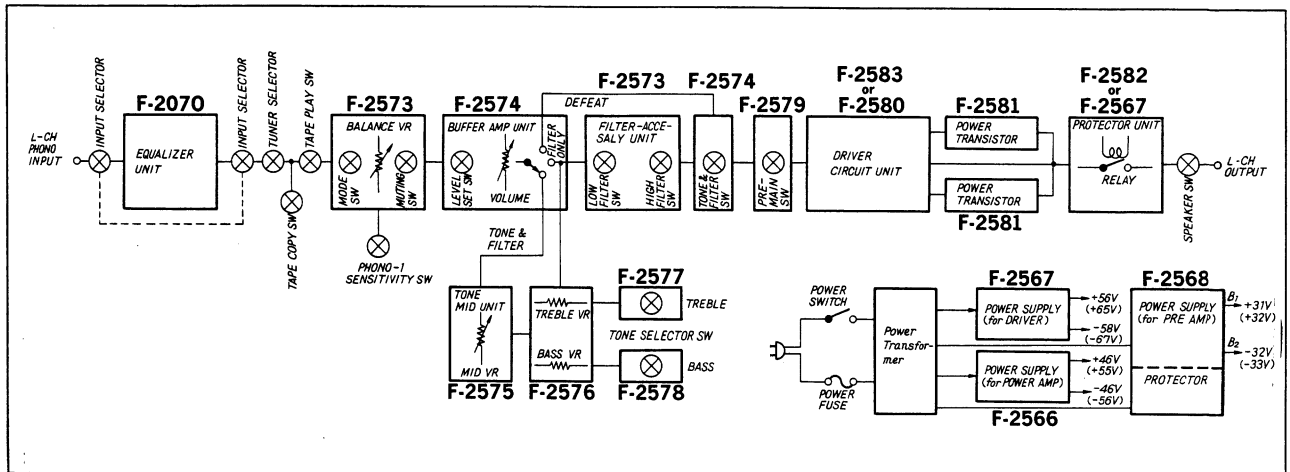

3. ADJUSTMENTS

3-1. Driver Circuit Board Adjustments

- Note: 1. Master Volume.....Minimum
 2. Room Temperature10~35°C
 3. For adjustment, run the unit for more than 5 minutes after the power is switched on.

STEP	SUBJECT	EQUIPMENT	MESURE OUTPUT	ADJUST	ADJUST FOR	CONDITION
1	DC 0V L-CH	DC Volt Meter	Speaker Terminal Fig. 3-2	F-2580 VR01 Fig. 3-1	0V ±10mV	Set bias current to minimum by VR03 and VR04 (clockwise)
2	DC 0V R-CH	DC Volt Meter	Same as above	F-2580 VR02 Fig. 3-1	0V ±10mV	
3	Bias Current L-CH	DC Milliammeter	Terminal 06 of F-2566 Fig. 3-1	F-2580 VR03 Fig. 3-1	50mA ±1mA	After setting leads ⊕⊖ from DC milliammeter to two points as Fig. 3-1 for this adjustment, set power switch to ON.
4	Bias Current R-CH	DC Milliammeter	Terminal 01 of F-2566 Fig. 3-1	F-2580 VR04 Fig. 3-1	50mA ±1mA	

※Change lead's polarity if meter swings backward.

Fig. 3-1


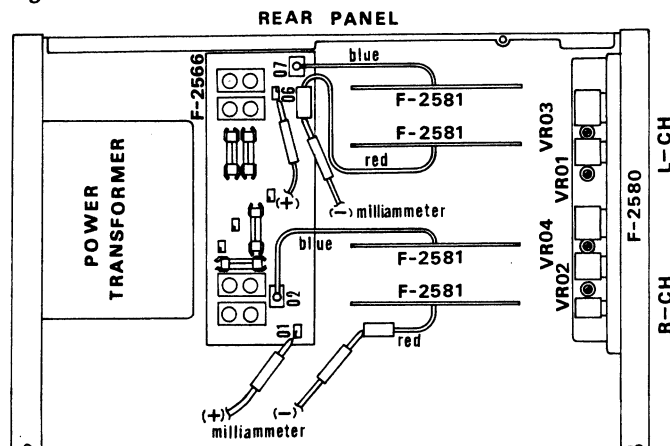


Fig. 3-2




4. TROUBLESHOOTING

4-1. Troubleshooting Chart


Troubleshootings on Main Amp. section (Feed signal...to MAIN IN)

Starting Check Point

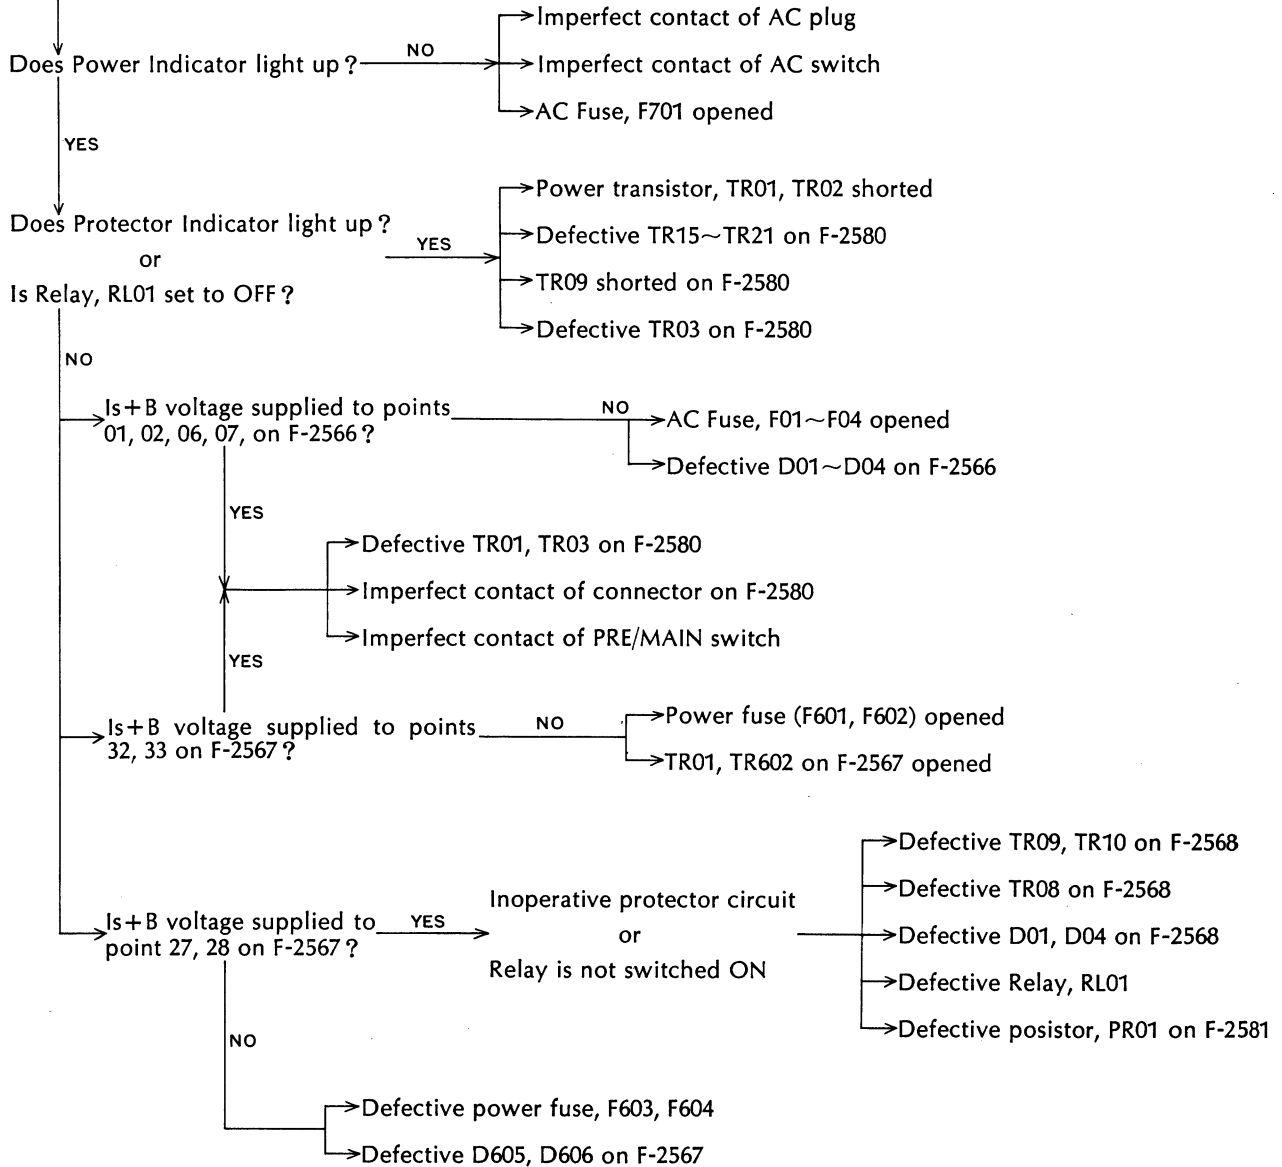

Troubleshooting on Pre Amp. Section (Feed signal to PHONO INPUT)

Starting Check Point

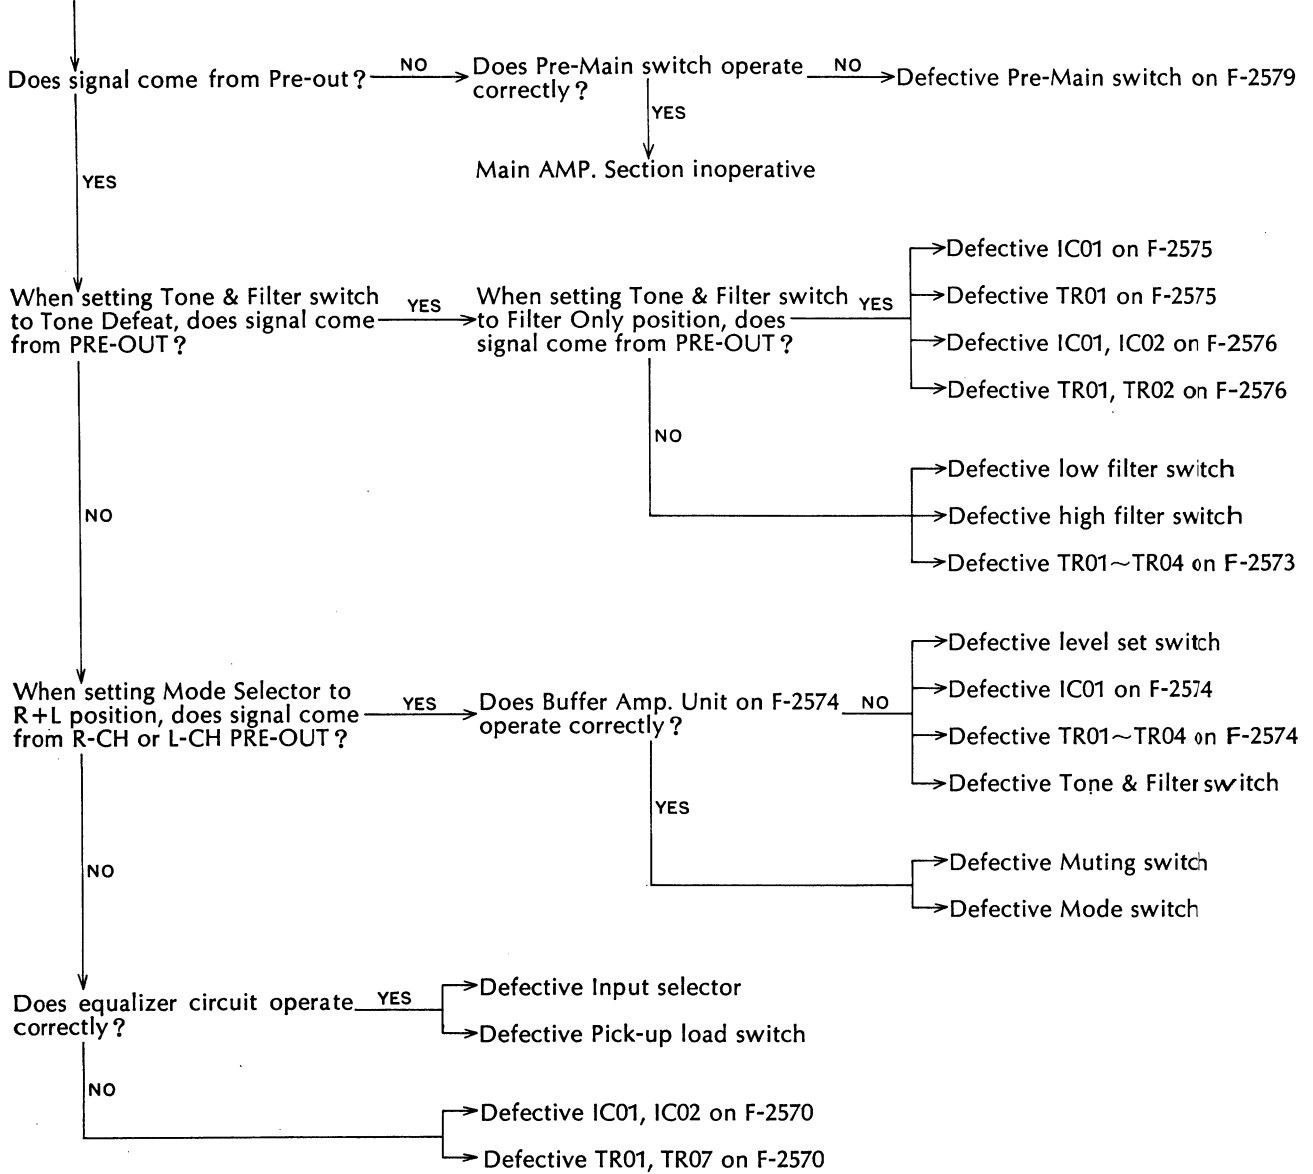


*Please utilize this "Troubleshooting Chart" together with Operating Block Diagram in next page, if necessary.

5. PARTS LOCATION AND PARTS LIST

5-1. F-2566 Power Supply Circuit Board
 Counductor Side

AU-9900 (Stock No. 7501201)
 AU-11000 (Stock No. 7501231)

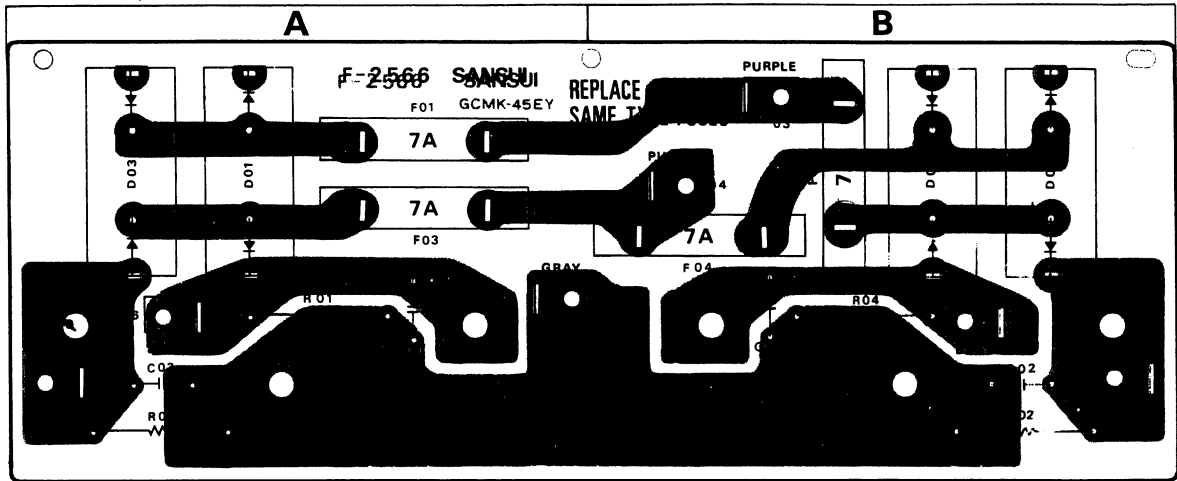


Parts List

Parts No.	Stock No.	Description	
D01, 02	0311310	SS-5	Diode
D03, 04	0311320	SS-5R	
C01, 02	0659011	10000 pF	500V C.C.
C03, 04	0659011	10000 pF	
C901, 902	0605477	0.047 μF	
R01, 02	0105332	3.3kΩ 2W C.R.	

Parts No.	Stock No.	Description	
R03, 04	0105332	3.3kΩ 2W C.R.	A. B
	2310051	P type Fuse Holder	
AU-9900 only			
F01-04	0431280	5A 250V AC Fuse	A. B
AU-11000 only			
F01-04	0431300	7A 250V AC Fuse	A. B

5-2. F-2568 Regulated Power Supply & Protector Circuit Board
 Counductor Side


AU-9900 (Stock No. 7501221)
 AU-11000 (Stock No. 7501251)

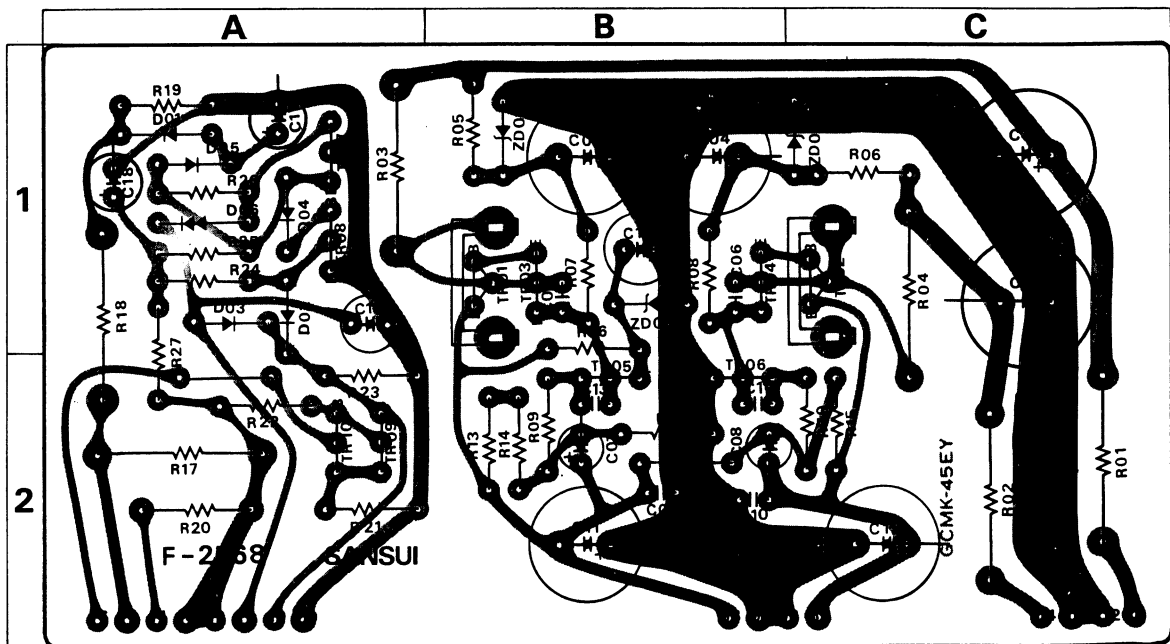

4-2. Operation Block Diagram


F-2570 EQUALIZER BLOCK OPERATION DIAGRAM

F-2570 EQUALIZER BLOCK OPERATION DIAGRAM

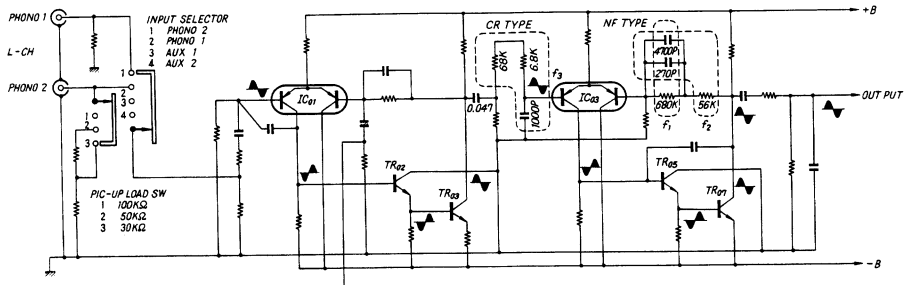

INPUT SELECTOR
1 PHONO 2
2 PHONO 1
3 AUX 1
4 AUX 2


SENSITIVITY SW
1 8mV
2 4mV
3 2mV



RIAA EQUALIZER CHARACTERISTICS


* A curve of RIAA characteristics in equalizer circuit is obtained by combination of CR & NF type.

DRIVE & POWER CIRCUIT

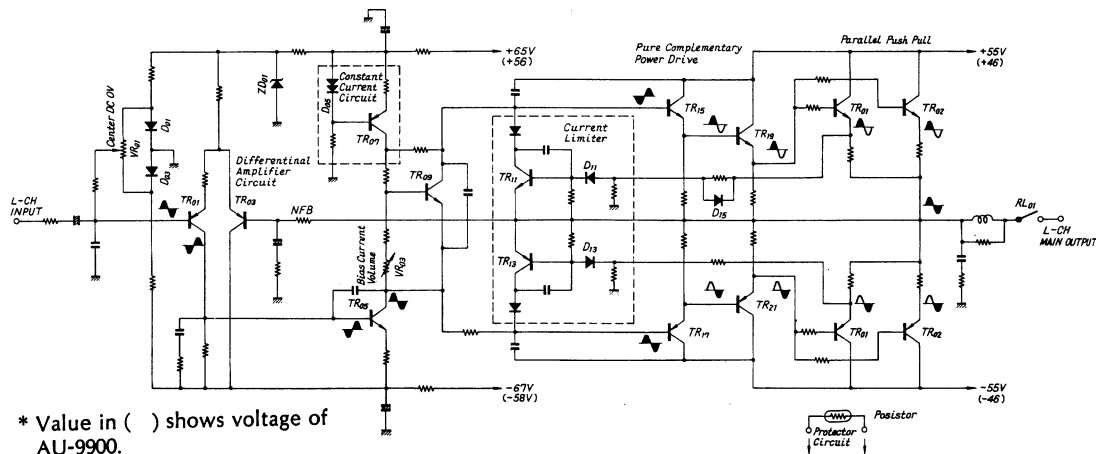

* Value in () shows voltage of AU-9900.

PROTECTOR CIRCUIT

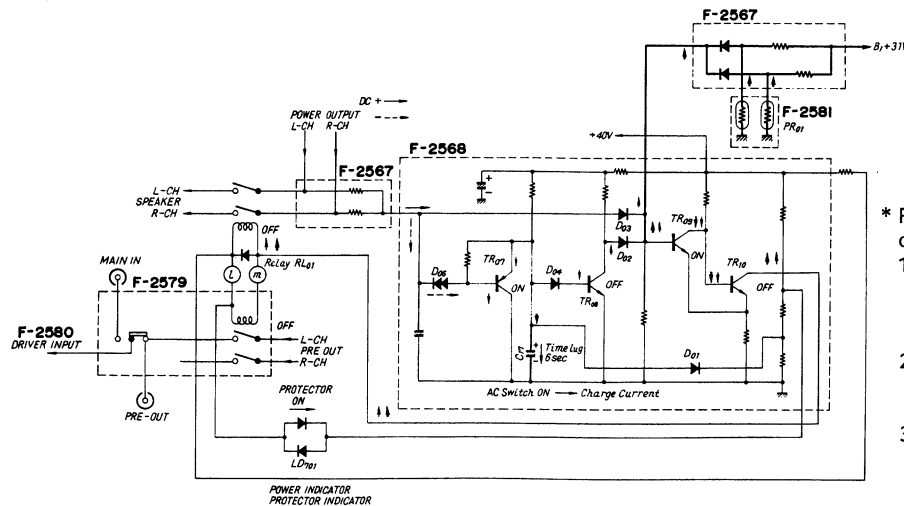

- * Protection circuit is composed of the followings, 1, 2 & 3.
1. Circuit to protect speakers from break-down against continuous or momentary DC voltage.
 2. Circuit with posistor to protect power transistors from thermal runaway.
 3. Transient canceller circuit by relay to be completely free from pop noise at PRE-OUT.


Parts List

Parts No.	Stock No.	Description	Position
TR01	0308450, 1	2SD356 (C, D)	1B
TR02	0303280, 1	2SB526 (C, D)	1C
TR03	0306070, 1	2SC1313 (F, G)	1B
TR04	0300470, 1	2SA726 (F, G)	1B
TR05	0306070, 1	2SC1313 (F, G)	2B
TR06	0300470, 1	2SA726 (F, G)	2B
TR07	0300511, 2	2SA733 (G, H)	1A
TR08	0306070, 1	2SC1313 (F, G)	1A
TR09	0306070, 1	2SC1313 (F, G)	2A
TR10	0306131, 2	2SC1364 (6, 7)	2A
D01	0310331	1N60	1A
D02	0311050	1S953	1A
D03	0311050	1S953	1A
D04	0311050	1S953	1A
D06	0310490	SV-02	1A
ZD01	0316610	RD39E B	1B
ZD02	0316610	RD39E B	1C
ZD03	0316250	RD-10E B	1B
C01	0519904	220µF 80V E.C.	1C
C02	0519904	220µF 80V E.C.	1C
C03	0515101	100µF 50V E.C.	1B
C04	0515101	100µF 50V E.C.	1B
C05	0660330	33pF 50V C.C.	1B
C06	0660330	33pF 50V C.C.	1B
C07	0515100	10µF 50V E.C.	2B
C08	0515100	10µF 50V E.C.	2B
C09	0457103	10000pF 50V C.C.	2B
C10	0457103	10000pF 50V C.C.	2B
C11	0515101	100µF 50V E.C.	2B
C12	0515101	100µF 50V E.C.	2C
C15	0512101	100µF 16V E.C.	1B
C16	0531221	220µF 10V E.C.	1B
C17	0510331	330µF 6.3V E.C.	1B
C18	0515339	3.3µF 50V E.C.	1B
R01	0105121	120Ω	2C
R02	0105121	120Ω	2C
R03	0105221	220Ω 2W C.R.	1A
R04	0105221	220Ω	1C
R05	0107332	3.3kΩ	1B
R06	0107332	3.3kΩ	1C
R07	0107392	3.9kΩ	1B
R08	0107222	2.2kΩ	1B
R09	0107102	1kΩ	2B
R10	0107102	1kΩ	2C
R11	0107472	4.7kΩ ¼W C.R.	2B
R12	0107123	12kΩ	2B
R13	0107332	3.3kΩ	2B
R14	0107682	6.8kΩ	2B
R15	0107123	12kΩ	2C
R16	0107682	6.8kΩ	1B
R17	0105151	150Ω 2W C.R.	2A
R18	0183471	470Ω 3W Ce.R.	1A, 2A
R19	0107680	68Ω ¼W C.R.	1A
R20	0103471	470Ω ¼W C.R.	2A
R21	0107100	10Ω	2A
R22	0107473	47kΩ	2A
R23	0107104	100kΩ	2A
R24	0107333	33kΩ ¼W C.R.	1A
R25	0107474	470kΩ	1A
R26	0107223	22kΩ	1A
R27	0107222	2.2kΩ	1A, 2A
2410770		4P Pin Ass'y C type	
2410790		8P Pin Ass'y C type	
2410960		3P Pin Ass'y F type	

5-3. F-2567 Power Supply Circuit Board for Driver AMP. AU-9900 (Stock No. 7501211)
AU-11000 (Stock No. 7501241)

* Power supply circuit board, either F-2567 or F-2582 for driver amplifier, is used in this model. When replacing the printed circuit board, use same type of the board for easy installation.

Conductor Side

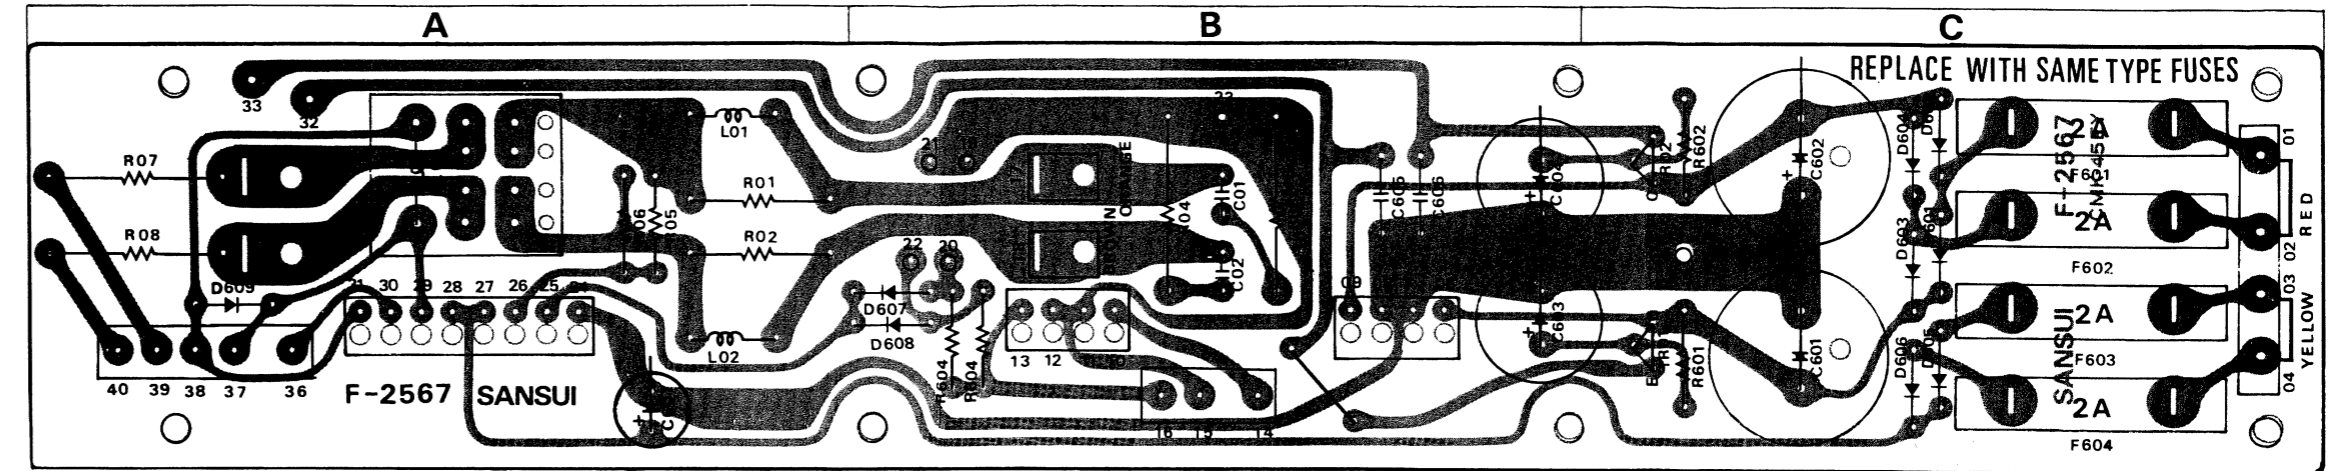


Parts List

Parts No.	Stock No.	Description	Position	Parts No.	Stock No.	Description	Position	Parts No.	Stock No.	Description	Position	Parts No.	Stock No.	Description	Position
TR601	0305900, 1	2SC1124 (1, 2)	A	D606	0310340	10D1	C	C603	0519902	47µF 80V E.C.	B	R05	0107823	82kΩ	A
TR602	0300480, 1	2SA706-5 (1, 2)	A	D607	0311050	1S953	B	C604	0519902	47µF 80V E.C.	B	R06	0107683	68kΩ	A
				D608	0311050	1S953	B	C605	0659011	10000pF 500V C.C.	B	R601	0107103	10kΩ	C
				D609	0310340	10D1	A	C606	0659011	10000pF 500V C.C.	B	R602	0107103	10kΩ	C
								C01, 02	0601687	0.068µF 50V M.C.	B	R603	0107224	220kΩ	B
								C601	0549301	470µF 80V E.C.	A	R604	0107224	220kΩ	B
								C602	0549301	407µF 80V E.C.	C	L01, 02	4290210	2.5µH Filter Coil	A
								C01, 02	0601687	0.068µF 50V M.C.	B				
								C701, 702	0000000	00µF	B				
								R01, 02	0104479	4.7Ω 1W C.R.	B				
								R03, 04	0105100	10Ω 2W C.R.	B				

5-4. F-2582 Power Supply Circuit Board for Driver AMP. AU-9900 (Stock No. 7501501)
AU-11000 (Stock No. 7501491)


Conductor Side

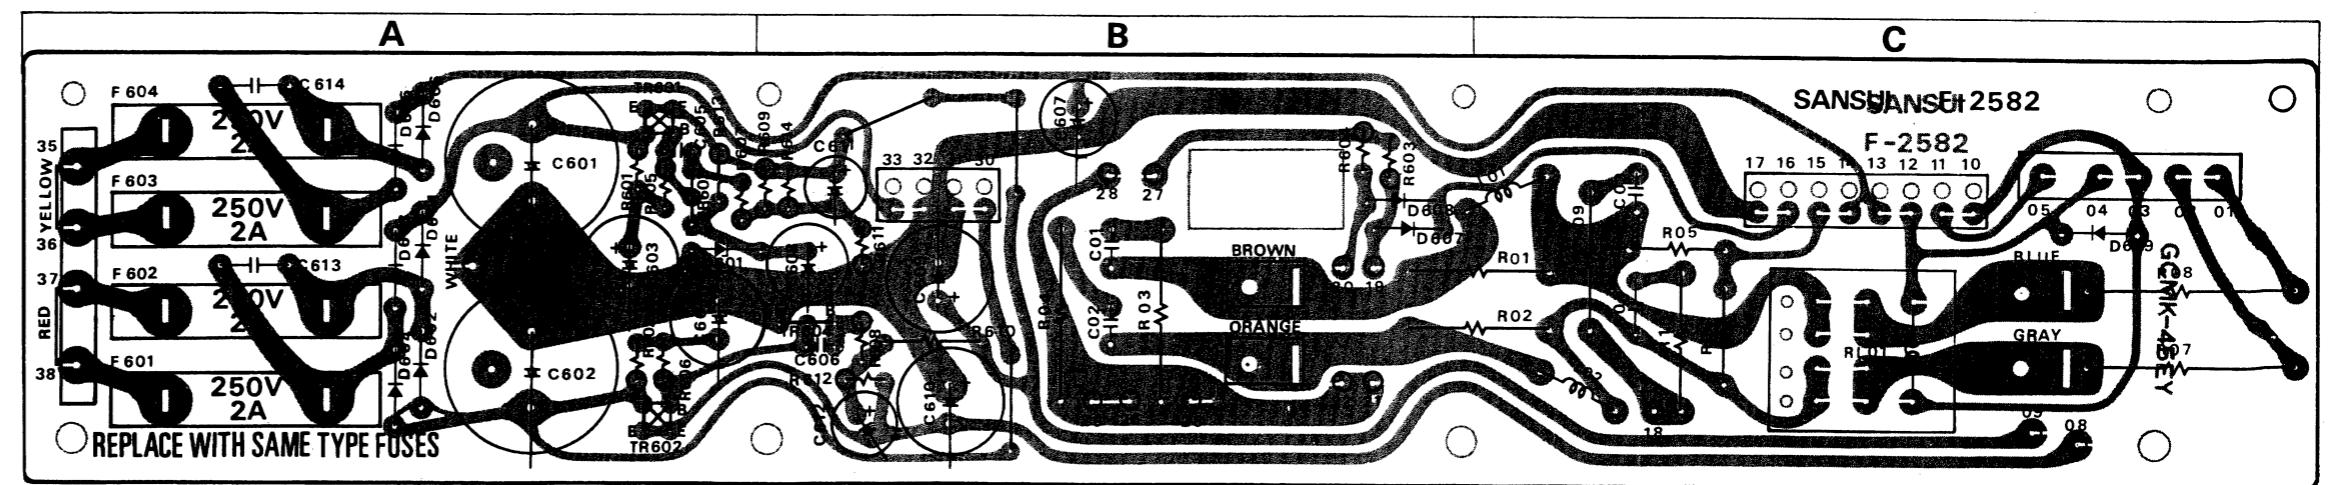

Parts List

Parts No.	Stock No.	Description	Position	Parts No.	Stock No.	Description	Position	Parts No.	Stock No.	Description	Position	Parts No.	Stock No.	Description	Position
TR601	0305900	2SC1124 (1, 2)	A	D606	0310340	10D1	A	C604	0660470	47pF 50V C.C.	B	R06	0107683	68kΩ ¼W C.R.	C
TR602	0308451, 2	2SD356 (D, E)	A	D607	0311050	1S953	B	C607	0515330	33µF 50V E.C.	B	R07, 08	0135221	220Ω 5W Ce.R.	C
TR603	0300480, 1	2SA706 (1, 2)	A	D608	0311050	1S953	B	C608	0512101	100µF 16V E.C.	B	R601	0106472	4.7kΩ	B
TR604	0306270, 1	2SC1708 (F, G)	B	D609	0310340	10D1	C	C609	0519902	47µF 80V E.C.	B	R602	0106472	4.7kΩ	A
TR604	0300470, 1	2SA726 (F, G)	B	ZD601	0316310	RD-13E B	A	C610	0519902	47µF 80V E.C.	B	R603	0106154	150kΩ	B
								C01, 02	0601687	0.068µF 50V M.C.	B	R604	0106154	150kΩ	B
								C601	0549301	470µF 80V E.C.	A	R605	0106332	3.3kΩ	A
								C602	0549301	470µF 80V E.C.	A	R606	0106332	3.3kΩ ¼W C.R.	A
								C603	0519902	47µF 80V E.C.	A	R607	0106102	1kΩ	A
								C604	0519902	47µF 80V E.C.	A	R608	0106102	1kΩ	B
								C605	0660470	47pF 50V C.C.	A	R609	0106273	27kΩ	B
												R05	0107823	82kΩ ¼W C.R.	C

5-5. F-2570 Equalizer Circuit Board AU-9900 (Stock No. 7550711)
 AU-11000 (Stock No. 7550721)
 Conductor side

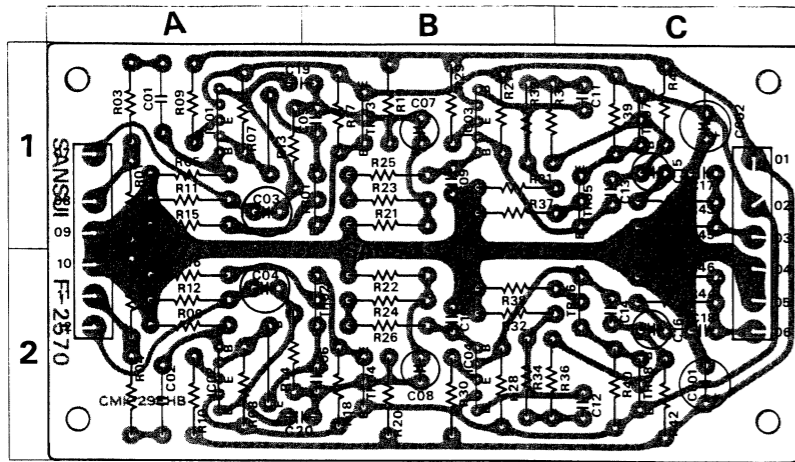


Parts List

Parts No.	Stock No.	Description	Position	Parts No.	Stock No.	Description	Position
TR01.02	0306070.1	25C1313 (F, G)	1 A. 2A	C01.02	0601478	0.47µF 50V M.C.	1 A. 2A
TR03.04	0306270.1	25C1708 (F, G)	1 B. 2B	C03.04	0512100	10µF 16V E.C.	1 A. 2A
TR05.06	0306070.1	25C1313 (F, G)	1 C. 2C	C07.08	0601478	0.47µF 50V M.C.	1 B. 2B
TR07.08	0306270.1	25C1708 (F, G)	1 C. 2C	C09.10	0630106	1000µF 50V E.C.	1 B. 2B
IC01.02	0360290.1	25A798 (F, G)	1 A. 2A	C11.12	0630476	4700µF 50V E.C.	1 C. 2C
IC03.04	0360290.1	25A798 (F, G)	1 B. 2B	C13.14	0660100	10µF 50V C.C.	1 C. 2C
				C15.16	0533339	3.3µF 25V E.C.	1 C. 2C

Parts No.	Stock No.	Description	Position
C17.18	0601276	0.0027µF 50V M.C.	1 C. 2C
C19.20	0660100	10µF 50V C.C.	1 A. 2A
C21.22	0660220	22µF 50V P.C.	
C23.24	0620271	270µF 50V P.C.	
C25.26	0519103	0.47µF 50V E.C.	2 C. 1C
C601.602	0515100	10µF 50V E.C.	
R01.02	0107224	220kΩ	1 A. 2A
R03.04	0107102	1kΩ	1 A. 2A
R05.06	0107184	180kΩ	1 A. 2A
R07.08	0107103	10kΩ	1 A. 2A
R09.10	0107124	120kΩ	1 A. 2A
R11.12	0107823	82kΩ	1 A. 2A
R13.14	0107184	180kΩ	1 A. 2A
R15.16	0107101	100Ω	1 A. 2A
R17.18	0107473	47kΩ	1 B. 2B
R19.20	0107682	6.8kΩ	1 B. 2B
R21.22	0107104	100kΩ	1 B. 2B
R23.24	0107683	68kΩ 1/4W C.R.	1 B. 2B
R25.26	0107682	6.8kΩ	1 B. 2B
R27.28	0107103	10kΩ	1 B. 2B
R29.30	0107823	82kΩ	1 B. 2B
R31.32	0107153	15kΩ	1 B. 2B
R33.34	0107584	680kΩ	1 B. 2B
R35.36	0107563	56kΩ	1 B. 2B
R37.38	0107101	100Ω	1 B. 2B
R39.40	0107473	47kΩ	1 C. 2C
R41.42	0107682	6.8kΩ	1 C. 2C
R43.44	0107101	100Ω	1 C. 2C
R45.46	0107104	100kΩ	1 C. 2C
	2410600	6P Pin Ass'y D type	


5-7. F-2573 Filter & Accessory Circuit Board AU-9900 (Stock No. 7561061)
 AU-11000 (Stock No. 7561111)
 Conductor Side

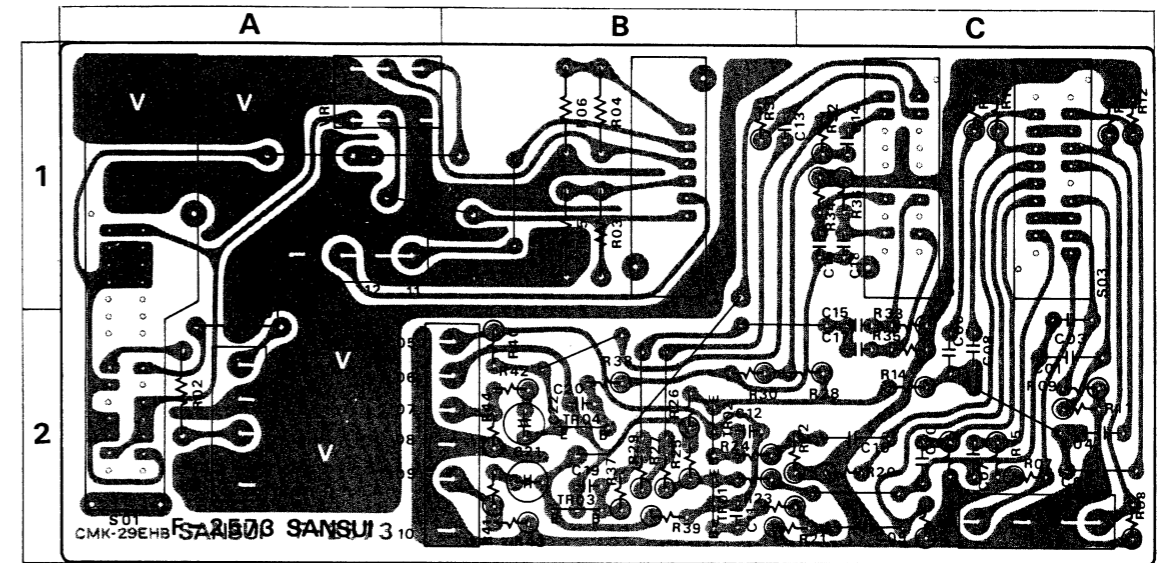

Parts List

Parts No.	Stock No.	Description	Position	Parts No.	Stock No.	Description	Position	Parts No.	Stock No.	Description	Position
TR01.02	0306270	25C1708 (F, G)	2 B. 2B	R03.04	0107154	150kΩ	1 B. 1B	R33.34	0106105	1MΩ	2 C. 1C
TR03.04	0300710.1	25A847 (F, G)	2 B. 2B	R05.06	0107183	18kΩ	1 B. 1B	R35.36	0106105	1MΩ	2 C. 1C
C01.02	0600158	0.15µF	2 C. 2C	R07.08	0106224	220kΩ	2 C. 2C	R37.38	0106102	1kΩ	2 B. 2B
C03.04	0600477	0.047µF	2 C. 2C	R09.10	0106105	1MΩ	2 C. 1C	R39.40	0107682	6.8kΩ 1/4W C.R.	2 B. 2B
C05.06	0600567	0.056µF 50V M.C.	2 C. 2C	R11.12	0106105	1MΩ	2 C. 1C	R41.42	0106101	100Ω	2 B. 2B
C07.08	0600187	0.018µF	2 C. 2C	R13.14	0106823	82kΩ	2 B. 2C	R43.44	0106104	100kΩ	2 B. 2B
C09.10	0601228	0.22µF	2 C. 2C	R15.16	0106105	1MΩ	2 C. 2C				
C11.12	0660100	10µF 50V C.C.	2 B. 2B	R17.18	0106105	1MΩ 1/4W C.R.	1 C	VR01	1015170.1	250kΩ Balance Volume	1 A
C13.14	0600566	0.0056µF	1 B. 1C	R19.20	0106394	390kΩ	2 C. 2C	S01	1190250	MODE Switch	1, 2A
C15.16	0600226	0.0022µF 50V M.C.	2 C. 1C	R21.22	0106394	390kΩ	2 B. 2B	S02	1170770	MUTING Switch	2 B. 2B
C17.18	0600276	0.0027µF	2 C. 1C	R23.24	0106102	1kΩ	2 B. 2B	S03	1170950	LOW FILTER Switch	1 C
C19.20	0660100	10µF 50V C.C.	2 B. 2B	R25.26	0106473	47kΩ	2 B. 2B	S04	1170950	HIGH FILTER Switch	1 C
C21.22	0533339	3.3µF 25V E.C.	2 B. 2B	R27.28	0106222	2.2kΩ	2 B. 2C				
R01.02	0107103	10kΩ 1/4W C.R.	2 A. 2A	R29.30	0106562	5.6kΩ	2 B. 2B				
				R31.32	0106105	1MΩ	1 B. 1C				


5-6. F-2569 Input Terminal & Switch Circuit Board AU-9900 (Stock No. 7592851)
 AU-11000 (Stock No. 7592921)
 Conductor Side

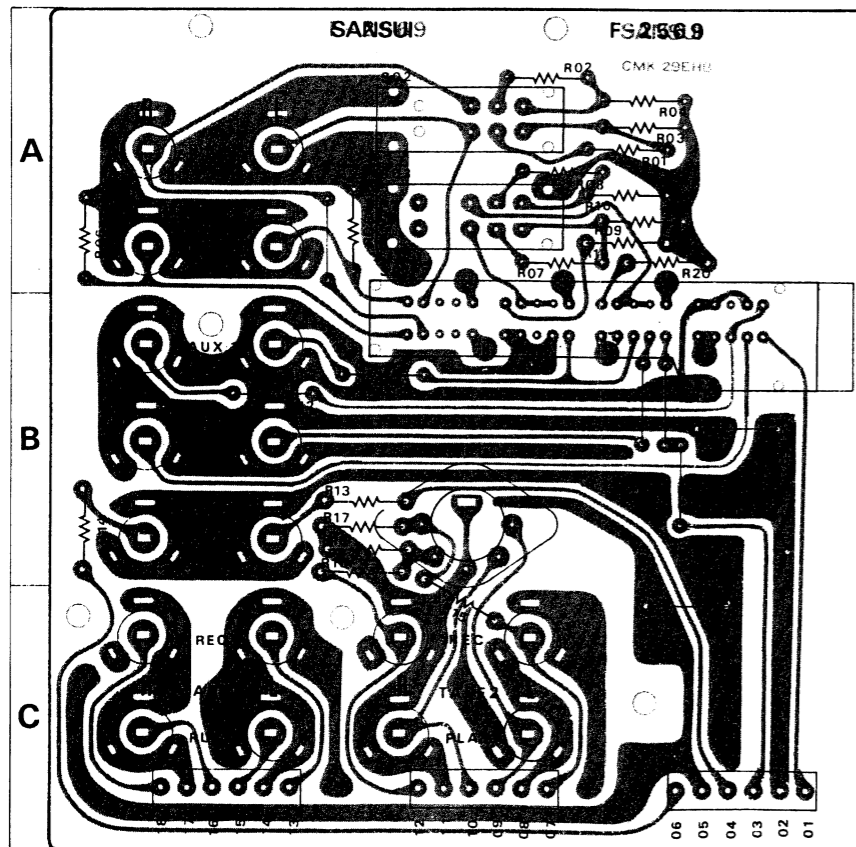

Parts List

Parts No.	Stock No.	Description	Position
R01.02	0107563	56kΩ	A. A
R03.04	0107473	47kΩ	A. A
R05.06	0107104	100kΩ	A. A
R07.08	0107333	33kΩ	A. A
R09.10	0107183	18kΩ	A. A
R11.12	0107102	1kΩ 1/4W C.R.	B. B
R13.14	0107102	1kΩ	B. B
R15.16	0107334	330kΩ	B. C B
R17.18	0107104	100kΩ	B. B
R19.20	0107183	18kΩ	A. A
S01	1190260	Input Selector Switch	A. B
S02	1110310	Pick-up Load Switch	A
S03	1110310	Sensitivity Switch	A
J01	2090030	Din Jack	B
	2410780	6P Pin Ass'y C type	
	2430260	2P Jack (white)	
	2430270	1P Jack (red)	

5-8. F-2574 Buffer AMP. Circuit Board AU-9900 (Stock No. 7592881)
 AU-11000 (Stock No. 7592951)
 Conductor Side

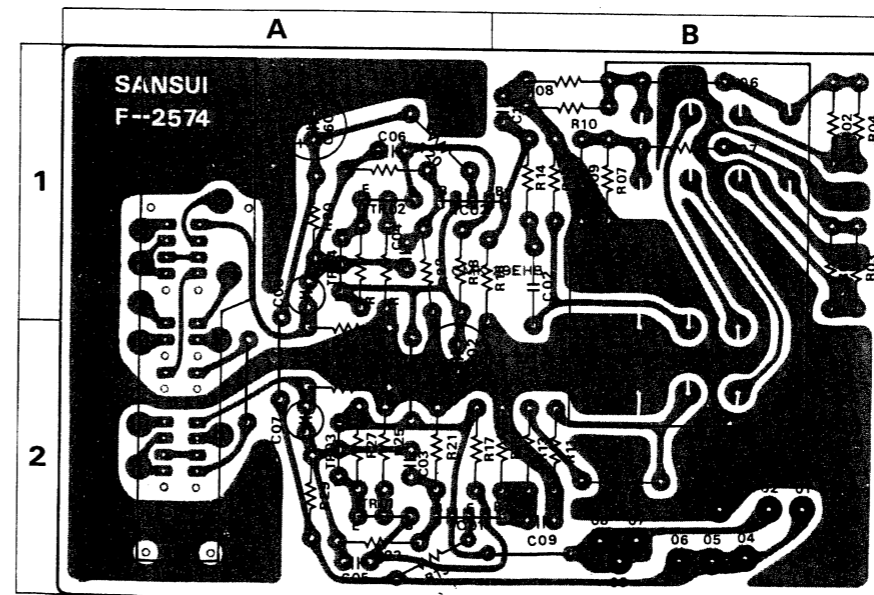


Parts List

Parts No.	Stock No.	Description	Position
TR01.02	0306070.1	25C1313 (F, G)	2 A. 1A
TR03.04	0306270.1	25C1708 (F, G)	2 A. 1A
IC01.02	0360290.1	25A798 (F, G) IC	2 A. B. 1A. B
C01.02	0601478	0.47µF 50V M.C.	2 B. 1B
C05.06	0660100	10µF 50V C.C.	2 A. 1A
C07.08	0533339	3.3µF 25V E.C.	2 A. 1A
C09.10	0660330	33µF 50V C.C.	2 B. 1B
C601	0515100	10µF	1 A
C602	0515100	10µF 50V E.C.	2 A
R01.02	0107224	220kΩ	1 B
R03.04	0107274	270kΩ	1 B
R05.06	0107563	56kΩ	1 B
R07.08	0107393	39kΩ	1 B
R09.10	0107473	47kΩ	1 B
R11.12	0107564	560kΩ	2 B. 1B
R13.14	0107332	3.3kΩ	2 B. 1B
R15.16	0107684	680kΩ	2 B. 1A
R17.18	0107103	10kΩ 1/4W C.R.	2 A. 1B
R19.20	0107124	120kΩ	2 A. 1B
R21.22	0107472	4.7kΩ	2 A. 1A
R23.24	0107273	27kΩ	2 A
R25.26	0107101	100Ω	2 A
R27.28	0107473	47kΩ	2 A
R29.30	0107682	6.8kΩ	2 A. 1A
R33.34	0107104	100kΩ	2 A
R35.36	0107471	470Ω	
VR01	1090120	250kΩ × 2 Volume	1, 2 B
S01	1190290	Tone & Filter Switch	1, 2 A

5-9. F-2575 Tone·Midrange Circuit Board AU-9900 (Stock No. 7561071)
AU-11000 (Stock No. 7561121)

Couductor Side

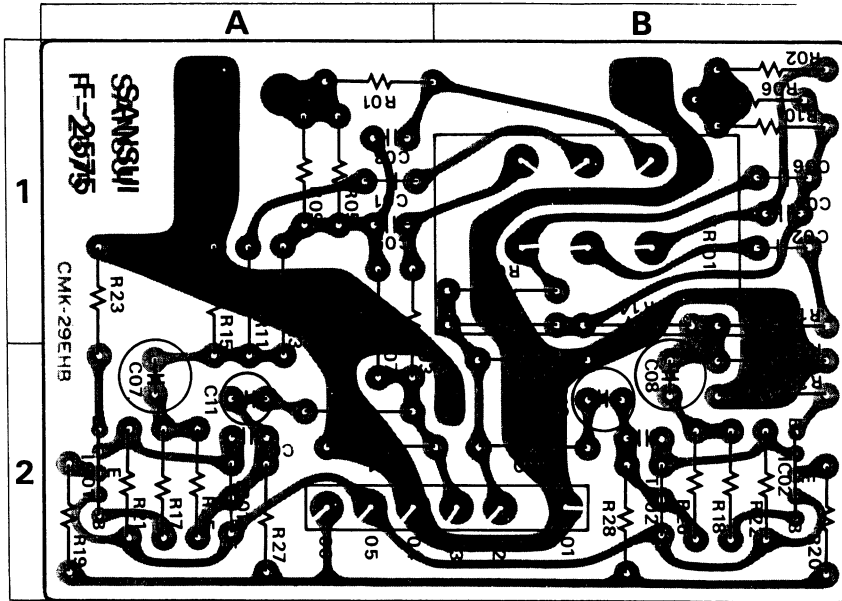


Parts List

Parts No.	Stock No.	Description	Position
TR01.02	0306270.1	2SC1708 (F, G) Transistor	1 B. 1A
IC01.02	0360290.1	2SA798 (F, G) IC	1 B. 1A
C01.02	0600686	0.0068μF	2 B. 2A
C03.04	0600107	0.01μF } 50V M.C.	2 B. 2A
C05.06	0600107	0.01μF	2 B. 2A
C07.08	0530470	47μF 6.3V E.C.	1 B. 1A
C09.10	0660680	68pF 50V C.C.	1 B. 1A
C11.12	0533339	3.3μF 25V E.C.	1 B. 1A
R01.02	0107472	4.7kΩ	2 B. 2A
R03.04	0107472	4.7kΩ	1,2B. 2A
R05.06	0107473	47kΩ	2 B. 2A
R07.08	0107473	47kΩ	1,2B. 2A
R09.10	0107105	1MΩ	2 B. 2A
R11.12	0107273	27kΩ	2 B. 2A
R13.14	0107223	22kΩ	2 B. 2A
R15.16	0107104	100kΩ	2 B. 1A
R17.18	0107102	1kΩ	1/4W C.R. 1 B. 1A
R19.20	0107124	120kΩ	1 B. 1A
R21.22	0107682	6.8kΩ	1 B. 1A
R23.24	0107102	1kΩ	2 B. 1A
R25.26	0107105	1MΩ	1 B. 1A
R27.28	0107682	6.8kΩ	1 B. 1A
R29.30	0107101	100Ω	1 B. 1A
R31.32	0107104	100kΩ	1 B. 1A
VR01	1090150.1	50kΩ (B) × 2 MID, Range Volume 2A	
	2410700	6P Pin Ass'y F type	

5-10. F-2576 Tone·Bass & Treble Circuit Board AU-9900 (Stock No. 7561081)
AU-11000 (Stock No. 7561131)

Couductor Side

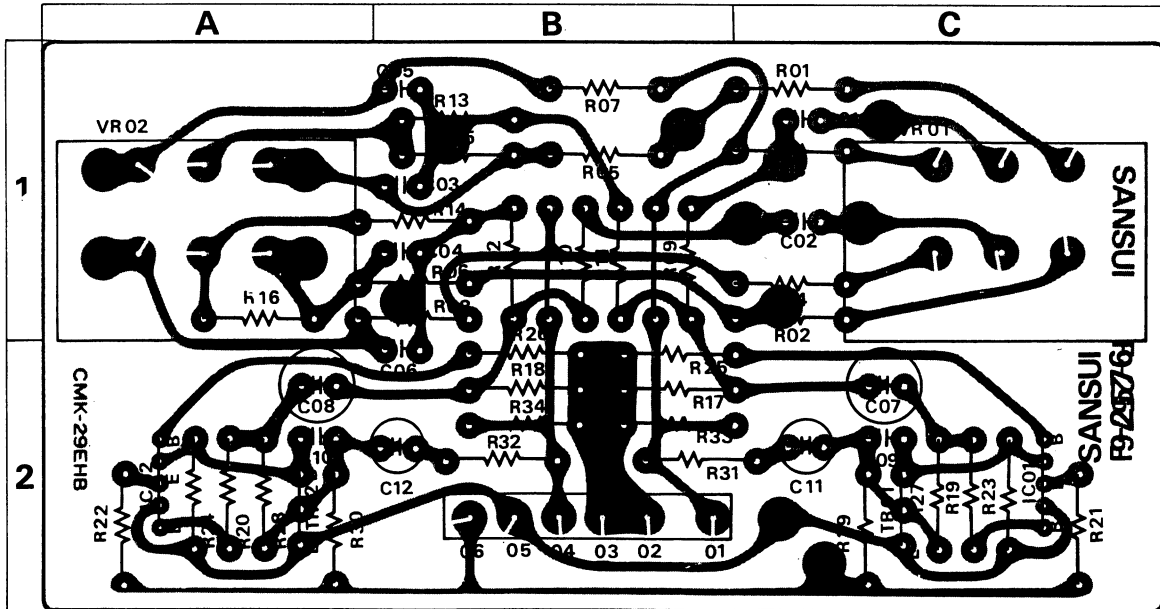

Parts List

Parts No.	Stock No.	Description	Position	Parts No.	Stock No.	Description	Position	Parts No.	Stock No.	Description	Position
TR01.02	0306270.1	2SC1708 (F, G) Transistor	2 C. 2A	R03.04	0107332	3.3kΩ	1 C	R23.24	0107682	6.8kΩ	2 C. 2A
IC01.02	0360290.1	2SA798 (F, G)	2 C. 2A	R05.06	0107153	15kΩ	1 B	R25.26	0107102	1kΩ	2 B
C01.02	0620301	300pF 50V P.C.	1 C. 1C	R07.08	0107153	15kΩ	1 B	R27.28	0107105	1MΩ	2 C. 2A
C03.04	0600157	0.015μF } 50V M.C.	1 B. 1B	R09.10	0107153	15kΩ	1 B	R29.30	0107682	6.8kΩ	1/4W C.R. 2 C. 2A
C05.06	0600157	0.015μF	1 B. 2B	R11.12	0107273	27kΩ	1 B	R31.32	0107101	100Ω	2 B
C07.08	0530470	47μF 6.3V E.C.	2 C. 2A	R13.14	0107222	2.2kΩ	1/4W C.R. 1 B	R33.34	0107104	100kΩ	2 B
C09.10	0660680	68pF 50V C.C.	2 C. 2A	R15.16	0107105	1MΩ	1 B. 2A				
C11.12	0533339	3.3μF 25V E.C.	2 C. 2B	R17.18	0107104	100kΩ	2 B	VR01	1090150.1	50kΩ (B) × 2 Treble Volume	1 C
R01.02	0107332	3.3kΩ 1/4W C.R.	1 C	R19.20	0107102	1kΩ	2 C. 2A	VR02	1090150.1	50kΩ (B) × 2 Bass Volume	1 A
				R21.22	0107124	120kΩ	2 C. 2A		2410700	6P Pin Ass'y F type	


5-11. F-2581 Power AMP. (+) Circuit Board

AU-9900 (Stock No. 7592901)
 AU-11000 (Stock No. 7592971)

5-12. F-2581 Power AMP. (-) Circuit Board

AU-9900 (Stock No. 7592911)
 AU-11000 (Stock No. 7592981)

Conductor side

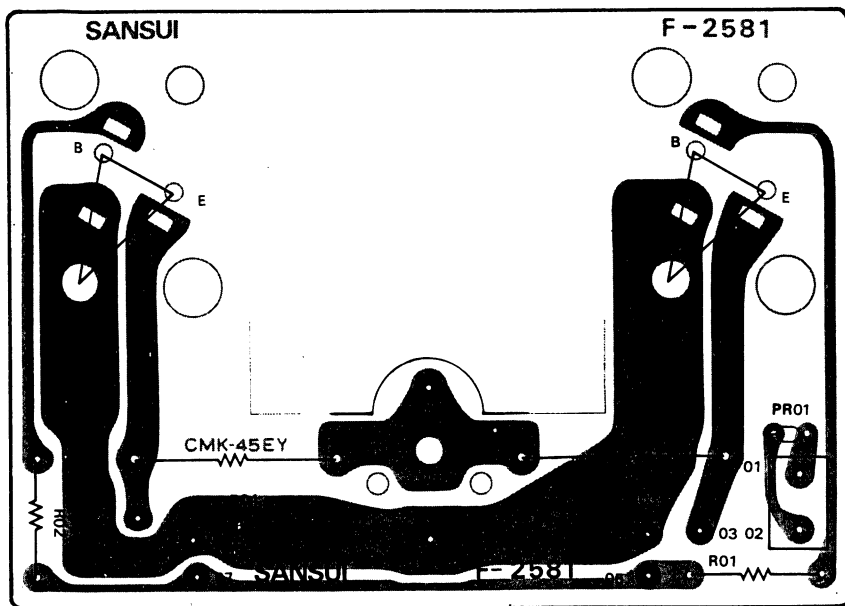

Parts List <+ Side>

Parts No.	Stock No.	Description
TR01	0305841.2	25C1116 (O. Y.)
TR02	0305841.2	25C1116 (O. Y.)
} Transistor		
R01	0103479	4.7Ω
R02	0103479	4.7Ω
} 1/2W C.R.		
R03	0135338	0.33Ω
R04	0135338	0.33Ω
} 5W Ca.R.		
	2030040	Power Transistor Socket


Parts List <- Side>

Parts No.	Stock No.	Description
TR01	0300521.2	25A747 (O. Y.)
TR01	0300521.2	25A747 (O. Y.)
} Transistor		
PR01	0320120	Posistor 12.5V DC 500Ω
R01	0103479	4.7Ω
R02	0103479	3.7Ω
} 1/2W C.R.		
R03	0135338	0.03Ω
R04	0135338	0.03Ω
} 5W Ca.R.		
	2030040	Power Transistor Socket
	2410650	2P Pin Ass'y D type

5-13. F-2571 Tape Copy & Tuner
 Switch Circuit Board

AU-9900 (Stock No. 7592861)
 AU-11000 (Stock No. 7592931)

Conductor Side

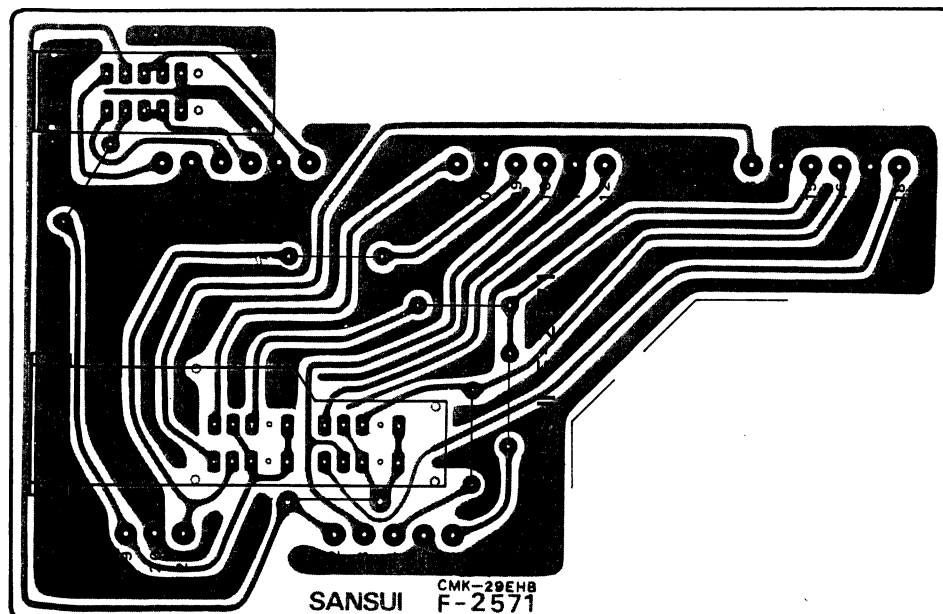


Parts List

Parts No.	Stock No.	Description
S01	1170870	Tuner Switch
S02	1190280	Tape Copy Switch

5-14. F-2577 Tone Selector (Treble) Circuit Board
 AU-9900 (Stock No. 7561091)
 AU-11000 (Stock No. 7561141)

Conductor Side




Parts List

Parts No.	Stock No.	Description
C01, 02	0620331	330pF } 50V P.C.
C03, 04	0620911	910pF }
R01, 02	0107105	1MΩ } 1/4W C.R.
R03, 04	0107105	1MΩ }
S01	1131150	Tone Selector, Treble Switch

5-15. F-2578 Tone Selector (Bass) Circuit Board
 AU-9900 (Stock No. 7561101)
 AU-11000 (Stock No. 7561151)

Conductor Side

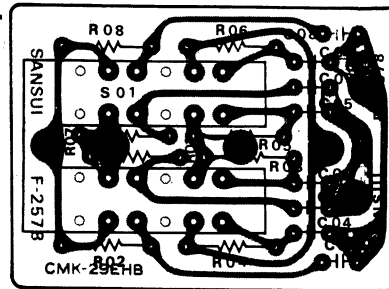


Parts List

Parts No.	Stock No.	Description
C01, 02	0600397	0.039μF } 50V M.C.
C03, 04	0600397	0.039μF }
C05, 06	0600127	0.012μF }
C07, 08	0600127	0.012μF }
R01, 02	0107105	1MΩ } 1/4W C.R.
R03, 04	0107105	1MΩ }
R05, 06	0107105	1MΩ }
R07, 08	0107105	1MΩ }
S01	1131140	Tone Selector Switch

5-16. F-2572 Tape Play Circuit Board
 AU-9900 (Stock No. 7592871)
 AU-11000 (Stock No. 7592941)

Conductor Side

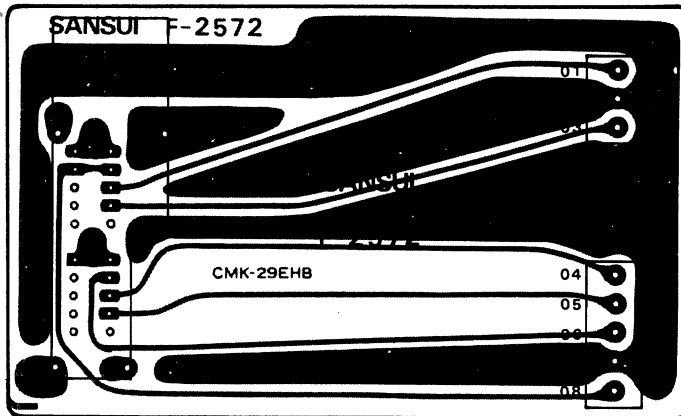


Parts List

Parts No.	Stock No.	Description
S01	1190270	Tape Play Switch
	2410760	3P Pin Ass'y
	2410780	6P Pin Ass'y

5-17. F-2579 Pre-Main Switch Circuit Board
 AU-9900 (Stock No. 7592891)
 AU-11000 (Stock No. 7592961)

Conductor Side

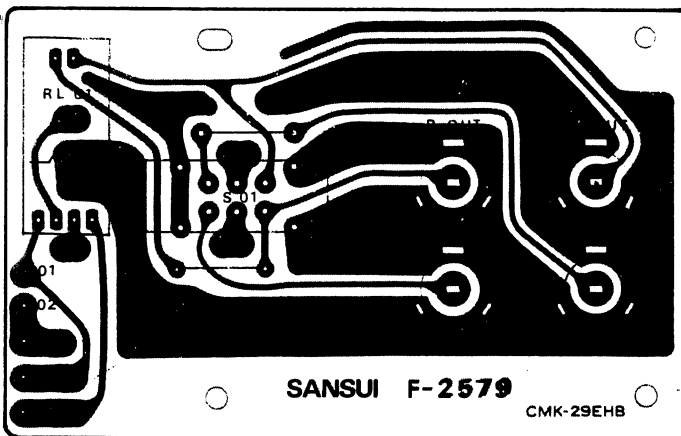

Parts List


Parts No.	Stock No.	Description
R901, 902	0107473	47KΩ
RL01	1150320	Relay
S01	1110320	PRE-MAIN Switch
	2430260	1P Jack (white)
	2430270	1P Jack (red)

5-18. F-2580 Driver AMP. Circuit Board

AU-9900 (Stock No. 7571171)

AU-11000 (Stock No. 7571181)

Conductor Side

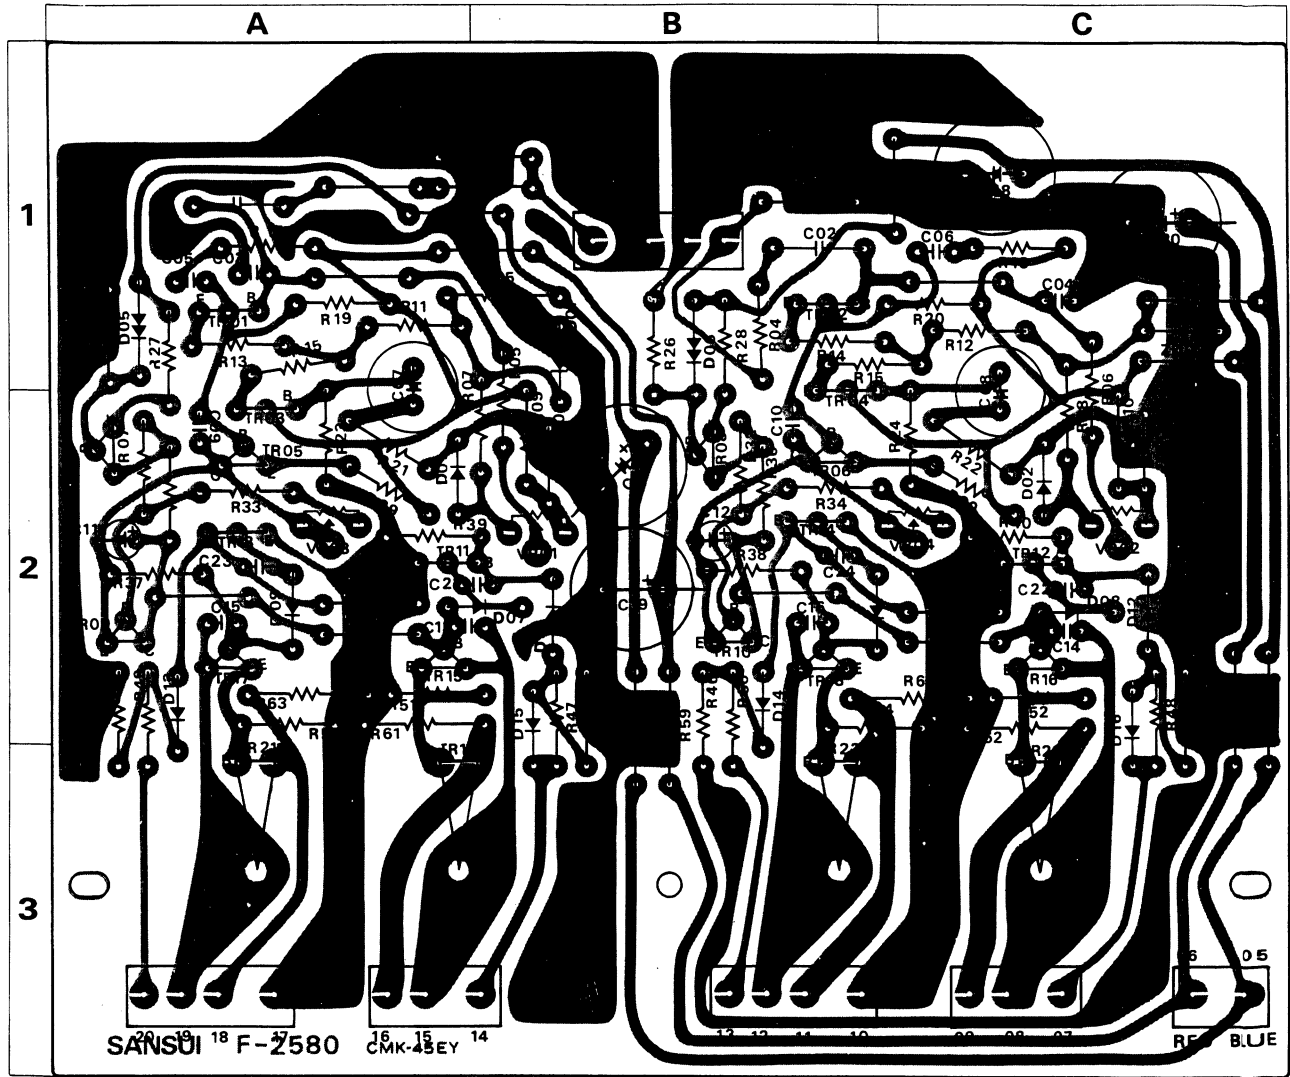

Parts List


Parts No.	Stock No.	Description	Position	Parts No.	Stock No.	Description	Position	Parts No.	Stock No.	Description	Position	
TR01, 02	0300710, 1	2SA847 (F, G)	1A. 1 B	C05, 06	0660101	100pF 50V C.C.	1A. 1 C	R31, 32	0107562	5.6kΩ	1A. 2 B	
TR03, 04	0300710, 1	2SA847 (F, G)	2A. 1 B	C07, 08	0531101	100pF 10V E.C.	1,2A. 1,2C	R33, 34	0107102	1kΩ	1A. 2 B	
TR05, 06	0306260, 1	2SC1628(O,Y)	2A. 2 B	C09, 10	0660220	22pF 50V C.C.	2A. 2 B	R35, 36	0107470	47Ω	1A. 2 B	
TR07, 08	0300700, 1	2SA818 (O, Y)	2A. 2 B	C11, 12	0515109	1μF 50V E.C.	2A. 2 B	R37, 38	0107102	1kΩ	1A. 2 B	
TR09, 10	0305871, 2	2SC984 (B, C)	2A. 2 B	C13, 14	0660330	33pF 50V C.C.	2A. 2 C	R39, 40	0107102	1kΩ	1A. 2 C	
TR11, 12	0305640, 1	2SC735 (O, Y)	2A. 2 C	C15, 16	0660330	33pF 50V C.C.	2A. 2 B	R41, 42	0107102	1kΩ	1A. 2 C	
TR13, 14	0300220, 1	2SA562 (O, Y)	2A. 2 B	C17, 18	0519903	100pF 80V E.C.	2B. 1 C	R43, 44	0107223	22kΩ	1B. 2 C	
TR15, 16	0305900, 1	2SC1124(1, 2)	2A. 2 C	C19, 20	0519903	100pF 80V E.C.	2B. 1 C	R45, 46	0107223	22kΩ	1A. 2 B	
TR17, 18	0300480, 1	2SA706-5(1,2)	2A. 2 B					R47, 48	0107471	470Ω	1B. 2 C	
TR19, 20	0308441, 2	2SD382 (M, L)	3A. 3 C	R01, 02	0107474	470kΩ	1AB. 1 B	R49, 50	0107471	470Ω	1A. 2 B	
TR21, 22	0303271, 2	2SB537 (M, L)	3A. 3 B	R03, 04	0107103	10kΩ	1AB. 1 B	R51, 52	0107122	1.2kΩ	1A. 2 B	
D01, 02	0340090	Diode	2A. 2 C	R05, 06	0107154	150kΩ	1,2B. 1,2C	R53, 54	0107122	1.2kΩ	1A. 28C	
D03, 04	0340090		2B. 2 C	R07, 08	0107682	6.8kΩ	2B. 1,2C	R55, 56	0103123	12kΩ	1A. B. 1 C	
D05, 06	0310490		1A. 1 B	R09, 10	0107393	39kΩ	2B. 2 C	R57, 58	0103221	220Ω	1B. 2 C	
D07, 08	0311050		1S953	2AB. 2C	R11, 12	0107472	4.7kΩ	1A. 1 C	R59, 60	0103221	220Ω	1B. 2 C
D09, 10	0311050		1S953	2A. 2 B	R13, 14	0107470	47Ω	1A. 1 B	R61, 62	0103680	68Ω	1A. 2 C
D11, 12	0311050		1S953	2B. 2 C	R15, 16	0107470	47Ω	1A. 1 C	R63, 64	0103680	68Ω	1A. 2A, B
D13, 14	0311050	1S953	2A. 2 B	R17, 18	0107221	220Ω	1A. 1 C					
D15, 16	0311050	1S953	2B. 2 C	R19, 20	0107182	1.8kΩ	1A. 1 C	VR01, 02	1031470, 1	5kΩ (B) DC 0V Volume	2B. 2 C	
ZD01, 02	0316250	RD-10E (B)	1B. 1 C	R21, 22	0107222	2.2kΩ	2A. 2 C	VR03, 04	1031441	1kΩ (B) Bias Current Volume	1A. 2 C	
C01, 02	0601478	0.47μF 50V M.C.	1A. 1 B	R23, 24	0107104	100kΩ	2A. 2 C					
C03, 04	0660470	47pF 50V C.C.	1A. 1 C	R25, 26	0107473	47kΩ	1A. 1 B					
				R27, 28	0107121	120Ω	1A. 1 B					
				R29, 30	0107121	120Ω	2A. 2 C					

* Driver amplifier circuit board either F-2580, F-2583, is used in this model. When replacing the printed circuit board, use same type of the board for easy installation.

5-19. F-2583 Driver AMP. Circuit Board

AU-9900 (Stock No. 7571311)
 AU-11000 (Stock No. 7571301)

Coundnctor Side

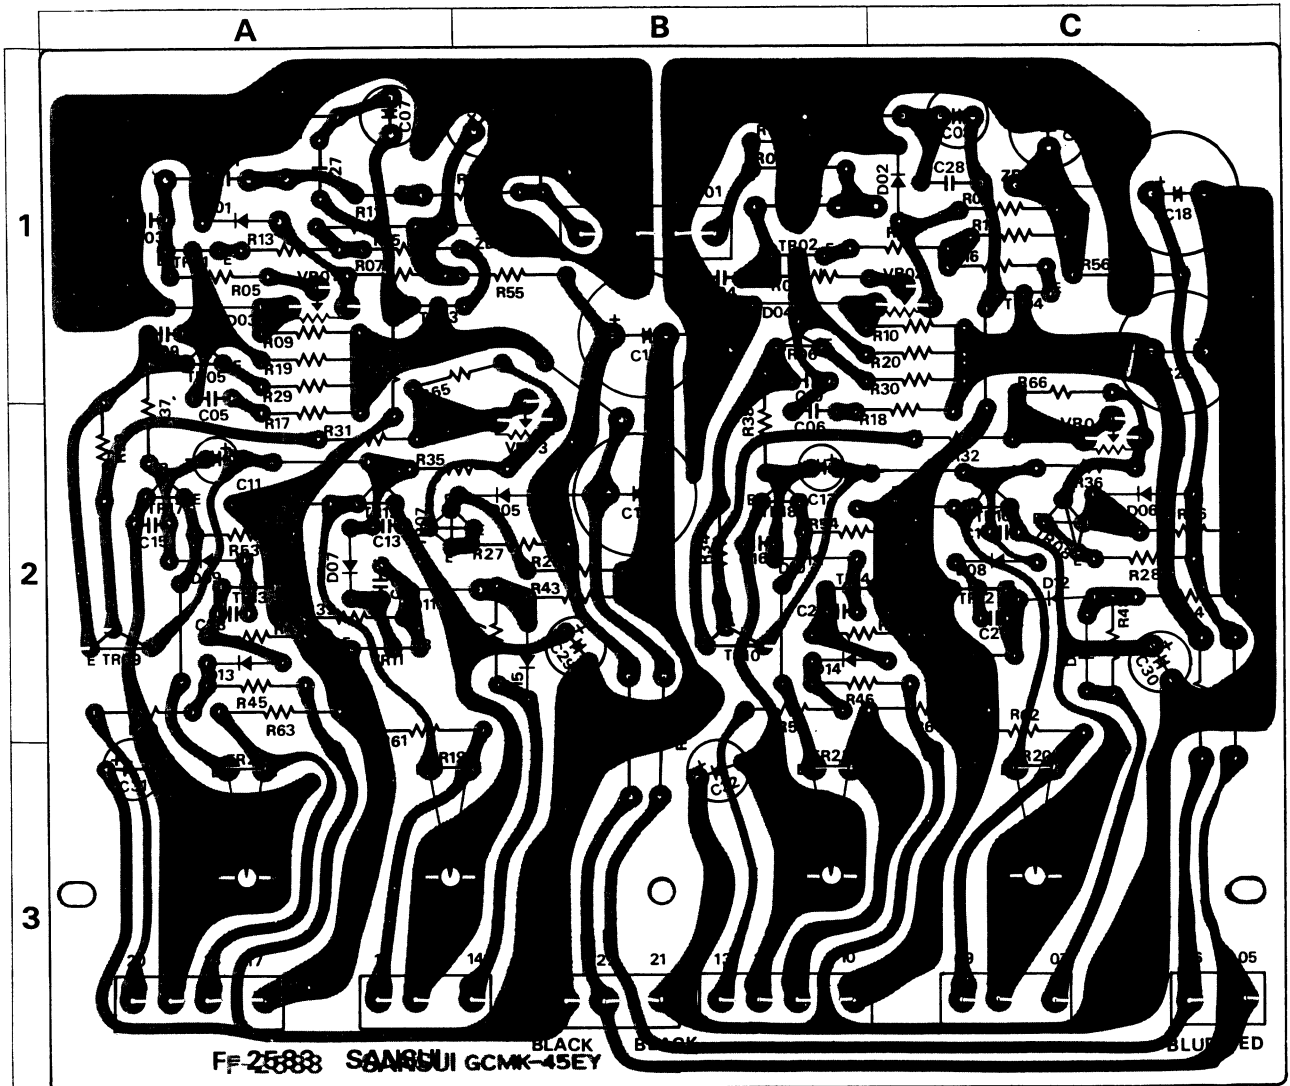

Parts List

Parts No.	Stock No.	Description	Position	Parts No.	Stock No.	Description	Position	Parts No.	Stock No.	Description	Position
TR01, 02	0300470, 1	2SA726 (F, G)	1 A. 1 B	C07, 08	0531101	100 μ F	10V E.C.	R27, 28	0107121	120 Ω	2 B. 2 C
TR03, 04	0300470, 1	2SA726 (F, G)	1A.B. 1 C	C09, 10	0660220	22pF	50V C.C.	R29, 30	0107121	120 Ω	1 A. 1 C
TR05, 06	0305900, 1	25C1124 (1, 2)	1 A. 1 B	C11, 12	0515109	1 μ F	50V E.C.	R31, 32	0107222	2.2k Ω	2A. 2 C
	0306260, 1	25C1628 (O, Y)		C13, 14	0660330	33pF	50V C.C.	R33, 34	0107102	1k Ω	2A. 2 C
TR07, 08	0300700, 1	2SA818 (O, Y)	2A.B. 2 C	C15, 16	0660330	33pF	50V C.C.	R35, 36	0107470	47 Ω	1/4W C.R.
	0300770, 1	2SA896-1-1, 2		C17, 18	0519903	100 μ F	80V E.C.	R37, 38	0107102	1k Ω	1.2A, 1.2B
TR09, 10	0305871, 2	25C984 (B, C)	2 A. 2 B	C19, 20	0519903	100 μ F	80V E.C.	R39, 40	0107102	1k Ω	2 A. 2 C
TR11, 12	0305640, 1	25C735 (O, Y)	2 A. 2 C	C21, 22	0601106	0.001 μ F	50V M.C.	R41, 42	0107102	1k Ω	2 A. 2B.C
TR13, 14	0300220, 1	2SA562 (O, Y)	2 A. 2B.C	C23, 24	0601106	0.001 μ F	50V M.C.	R43, 44	0107223	22k Ω	2 B. 2 C
TR15, 16	0305900, 1	25C1124 (1, 2)	2 A. 2 C	C25, 26	0512221	220 μ F	16V E.C.	R45, 46	0107223	22k Ω	2 A. 2B.C
TR17, 18	0300480, 1	25C706-S-1, 2	2 A. 2 B	C27, 28	0601108	0.1 μ F	50V M.C.	R47, 48	0107471	470 Ω	2 B. 2 C
TR19, 20	0308441, 2	2SD382 (M, L)	3A.B. 3 C	C29, 30	0516339	3.3 μ F	63WV E.C.	R49, 50	0107471	470 Ω	1/4W C.R.
TR21, 22	0303271, 2	2SB537 (M, L)	3 A. 3 B	C31, 32	0516339	3.3 μ F	63WV E.C.	R51, 52	0107122	1.2k Ω	2 A. 2 C
D01, 02	0340090	DS-430	1 A. 1 C	R01, 02	0107474	470k Ω	1 B	R53, 54	0107122	1.2k Ω	2 A. 2B.C
	0340090	DS-430		R03, 04	0107103	10k Ω	1A.B. 1 B	R55, 56	0103562	5.6k Ω	1 B. 1 C
D03, 04	0340090	DS-430	1 A. 1 B	R05, 06	0107154	150k Ω	1 A. 1 B	R57, 58	0103221	220 Ω	2.3B. 2 C
D05, 06	0340120	VD1212	2 B. 2 C	R07, 08	0107682	6.8k Ω	1 A. 1 C	R59, 60	0103221	220 Ω	1/4W C.R.
D07, 08	0311050	1S953	2 A. 2 C	R09, 10	0107273	27k Ω	1 A. 1 C	R61, 62	0103680	68 Ω	2 A. 2 C
D09, 10	0311050	1S953	2 A. 2 B	R11, 12	0107472	4.7k Ω	1 A. 1 C	R63, 64	0103680	68 Ω	2 A. 2 C
D11, 12	0311050	1S953	2A.B. 2 C	R13, 14	0107470	47 Ω	1/4W C.R.	R65, 66	0107472	4.7k Ω	1/4W C.R.
D13, 14	0311050	1S953	2 A. 2 B	R15, 16	0107470	47 Ω	1 A. 1 C	VR01, 02	1031470, 1	5k Ω (B)	DC 0V Volume
D15, 16	0311050	1S953	2 B. 2 C	R17, 18	0107221	220 Ω	2 A. 2 C	VR03, 04	1031480, 1	10k Ω (B)	Bias Current Volum
RD01, 02	0316310	RD-13E (B)	1 B. 1 C	R19, 20	0107821	820 Ω	1 A. 1 C	2410580		3P Pin Ass'y D type	1 A. 1 C
C01, 02	0601478	0.47 μ F 50V M.C.	1 A. 1 B	R21, 22	0107222	2.2k Ω	1 A. 1B.C	2410590		4P Pin Ass'y D type	2.3B. 2 C
C03, 04	0660470	47pF	1 A. 1 B	R23, 24	0107104	100k Ω	1 A. 1 C	2410650		2P Pin Ass'y D type	2 A. 2 C
C05, 06	0660101	100pF	1 A. 2 B	R25, 26	0107473	47k Ω	2 B. 2 C	2410680		4P Pin Ass'y F type	2 A. 2 C

5-20. Figures Semiconductors

SEMICONDUCTORS	COMPLETE CIRCUIT BOARD	SEMICONDUCTORS	COMPLETE CIRCUIT BOARD	SEMICONDUCTORS	COMPLETE CIRCUIT BOARD	SEMICONDUCTORS	COMPLETE CIRCUIT BOARD
2SA733 2SC1364	F-2568	2SA706 2SC1124	F-2567 F-2580	IN60	F-2568	SS-5	F-2566
2SC984	F-2580	2SA747 2SC1116	F-2581	10D-1 10D-2	F-2567	SS-5R	F-2566
2SA726 2SA847 2SC1313 2SC1708	F-2567 F-2568 F-2570 F-2573 F-2574 F-2575 F-2576	2SA562 2SC735	F-2580	DS430 VD1212	F-2580		
2SB526	F-2567 F-2568	2SA818 2SC1628	F-2580	SV-02	F-2568 F-2580		
2SB537 2SD356 2SD382	F-2567 F-2568 F-2580	2SA798	F-2570 F-2574 F-2575 F-2576	RD-10E RD-13E RD-39E	F-2567 F-2568 F-2580		

Connector & Pin Ass'y

Connector

Type A (3~10 pins)	Type B (2~6 pins)	Stock No.
		2 Pins 2420250
		3 Pins 2420220
		4 Pins 2420230
		5 Pins 2420210
		6 Pins 2420240

NOTE: Since stock number of female connectors (type B) with wires are not shown in each parts list of Complete circuit board, please refer to the above parts list when ordering the connector.


Pin Ass'y

Type A (3~10 pins) 	Type B (3~10 pins) 	Type C (3~10 pins)
Type D (2~6 pins) 	Type E (2~6 pins) 	Type F (2~6 pins)

Abbreviations

C.R. : Carbon Resistor	BP.E.C.: Bi-Polar Electrolytic Capacitor
S.R. : Solid Resistor	C.C. : Ceramic Capacitor
Ce.R. : Cement Resistor	Mi.C. : Mica Capacitor
M.R. : Metallized Film Resistor	O.C. : Oil Capacitor
M.C. : Mylar Capacitor	P.C. : Polystyrene Capacitor
E.C. : Electrolytic Capacitor	T.C. : Tantalum Capacitor


5-21. Other Parts (Front Side)

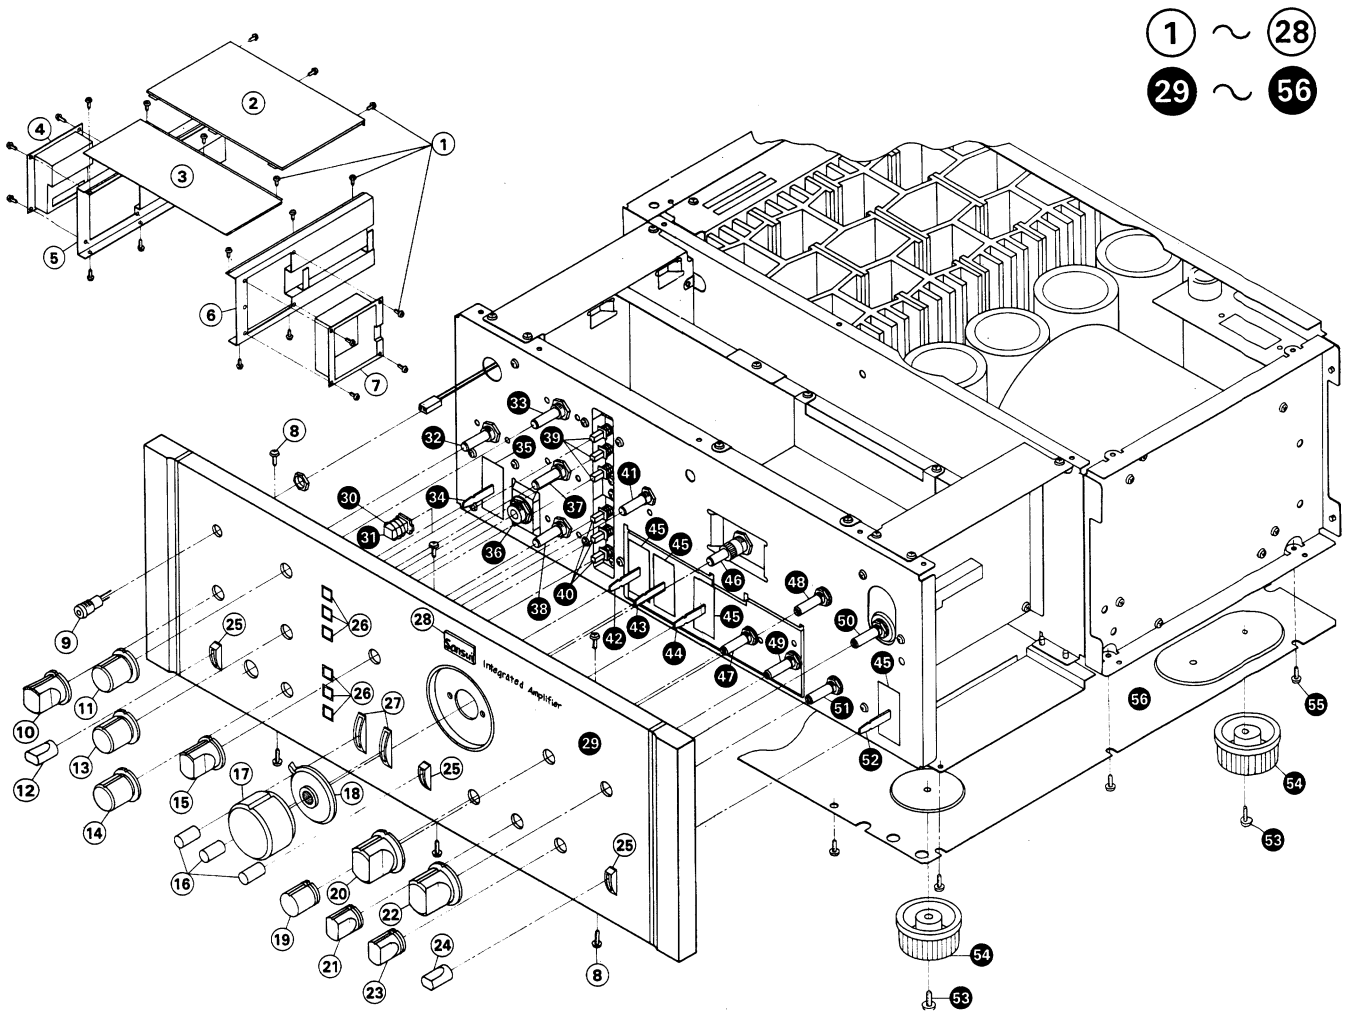

Parts List

Parts No.	Stock No.	Description	Parts No.	Stock No.	Description
1	5109222	Binding Head Tapping Screw M3×8	30	6906480	Spring, Push Knob
2	5006470	Bonnet (A)	31	5326530	Push Knob
3	5006520	Bonnet (B)	32	1101700, 1	Rotary Switch, Speakers Switch
4	5287420	Output Terminal Base	33	1090150, 1	50kΩ × 2, Treble Volume
5	5304080	Side Bonnet L-CH	34	1170330	Lever Switch, Power
6	5304090	Side Bonnet R-CH	35	5047470	Masking, Lever Switch
7	5287410	Input Terminal Base	36	2430190	Headphone Jack
8	5109222	Binding Head Tapping Screw M3×8	37	1090150, 1	50kΩ × 2, Midrange Volume
9	7726140	LED Ass'y, Protector Indicator	38	1090150, 1	50kΩ × 2, Bass Volume
10	5318260	C-6 Type Knob, Speaker Switch	39	1131150	Push Switch, Tone Selector (Treble)
11	5318251	B-6 Type Knob, Treble Volume	40	1131140	Push Switch, Tone Selector (Bass)
12	5326510	E-2 Type Knob, Power Switch	41	1190290	Tone & Filter Switch
13	5318251	B-6 Type Knob, Midrange Volume	42	1170950	Low Filter Switch
14	5318251	B-6 Type Knob, Bass Volume	43	1170950	High Filter Switch
15	5318260	C-6 Type Knob, Tone & Filter Switch	44	1170770	Lever Switch, Muting
16	5326520	E-3 Type Knob, Filter & Muting Switch	45	5047470	Masking, Lever Switch
17	5318360	G-6 Type Knob, Volume	46	1090120	250kΩ, Volume
18	5326540	Level Set Knob	47	1015170, 1	250kΩ, Balance Volume
19	5318270	D-6 Type Knob, Balance Volume	48	1190270	Tape Play Switch
20	5318370	H-6 Type Knob, Tape Play Switch	49	1190250	Mode Switch
21	5318280	F-6 Type Knob, Mode Switch	50	1190260	Input Selector
22	5318370	H-6 Type Knob, Input Selector	51	1190280	Tape Copy Switch
23	5318280	F-6 Type Knob, Tape Copy Switch	52	1170870	Lever Switch, Tuner
24	5326510	E-2 Type Knob, Tuner Switch	53	5101161	Binding Head Screw, M4×10
25	5286731	Lever Guide (1)	54	5517050	Leg
26	5286721	Knob Guide	55	5109222	Binding Head Tapping Screw, M3×8
27	5286741	Lever Guide (2)	56	5058491	Bottom Plate
28	5336580	Sansui Mark			
29	7007140	Panel Ass'y (AU-11000)			
	7007150	Panel Ass'y (AU-9900)			

5-22. Other Parts (Top & Bottom Side)

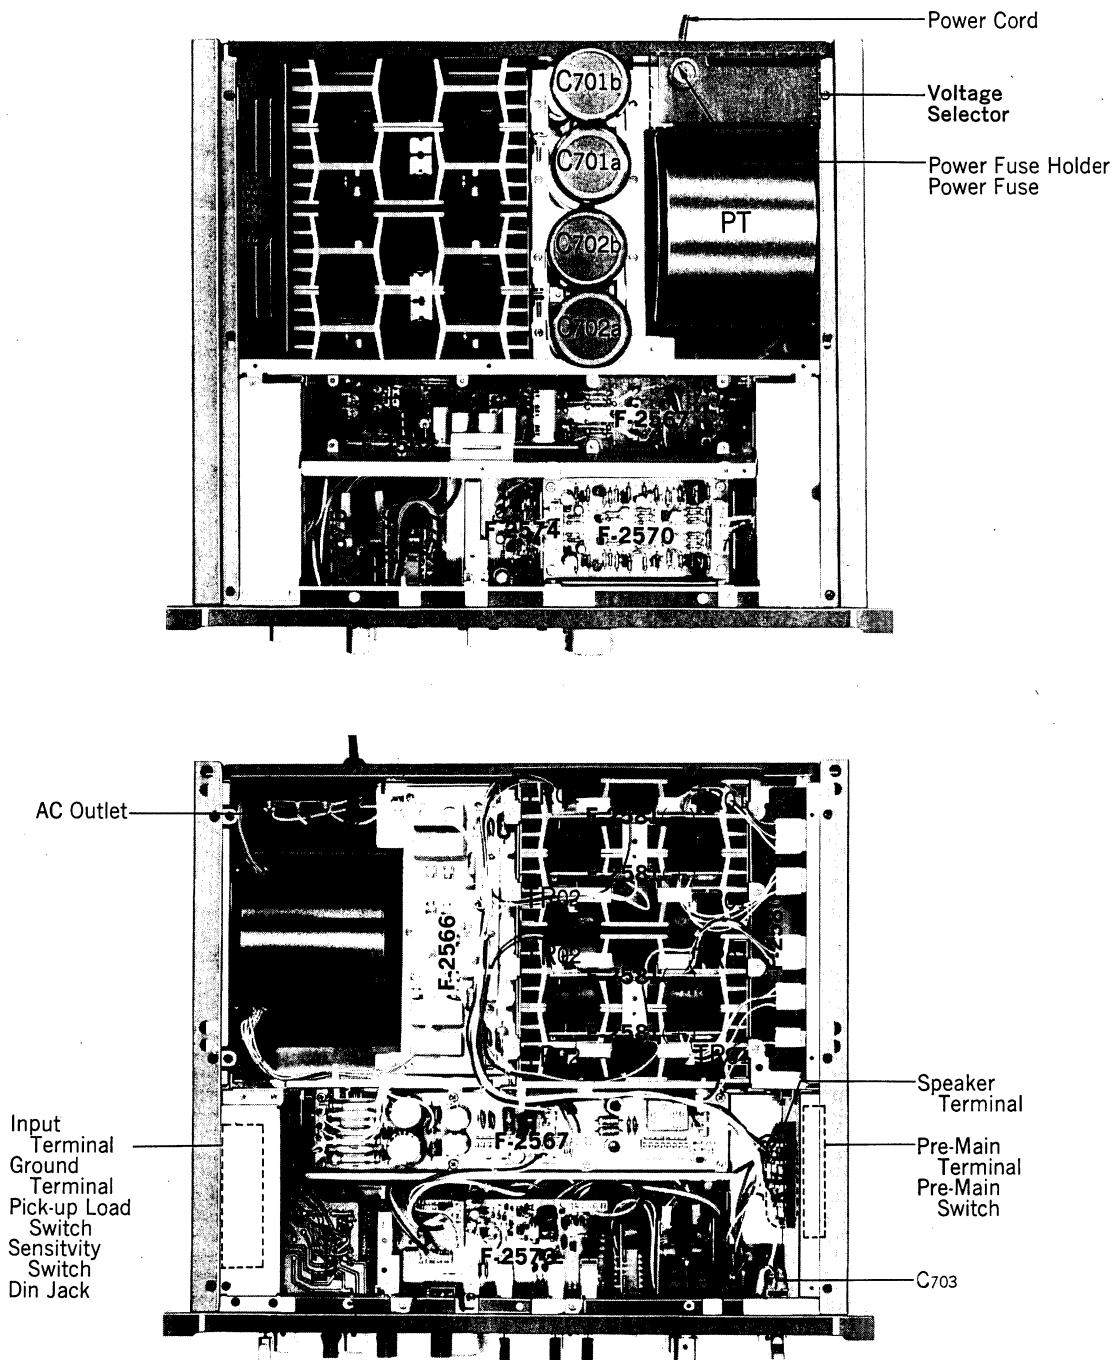


Parts List

Parts No.	Stock No.	Description
F-2581 (+ Side)		
TR01, 02	0305841, 2	25C1116
F-2581 (- Side)		
TR01, 02	0300521	25A747
C701, 702	0559514	10000µF 63V×2 E.C. (AU-11000)
C701, 702	0559513	6800µF 63V×2 E.C. (AU-9900)
C703	0659801	0.1µF 150V C.C.
F701	0431280	5A 250V (AC 100V~120V)
	0431320	10A 250V (AC 220V~240V)
	2300060	Power Fuse Holder
	3800250	Power Cord
	2290150	Ground Terminal
	2410091	Voltage Selector plug

Parts No.	Stock No.	Description
	2410830	Voltage Selector Socket
	2090030	Din Jack
	1110310	Pick-up Load Switch
	1110310	Sensitivity Switch
	1110320	Pre-Main Switch
	2430270	Pre-Main Terminal (red)
	2430260	Pre-Main Terminal (white)
	2290160	Speaker Terminal
	2450060	AC Outlet
	2430270	Input Terminal (red)
	2430260	Input Terminal (white)
	4002280	Power Transformer (AU-11000)
	4002290	Power Transformer (AU-9900)




6. SCHEMATIC DIAGRAM / 6-1. AU-9900 Pre AMP. Section

* La présentation et les spécifications sont susceptibles d'être modifiées sans préavis par suite d'améliorations éventuelles.
 * Änderungen, die dem technischen Fortschritt dienen, bleiben vorbehalten.
 * Design and specification subject to change without notice for improvements.

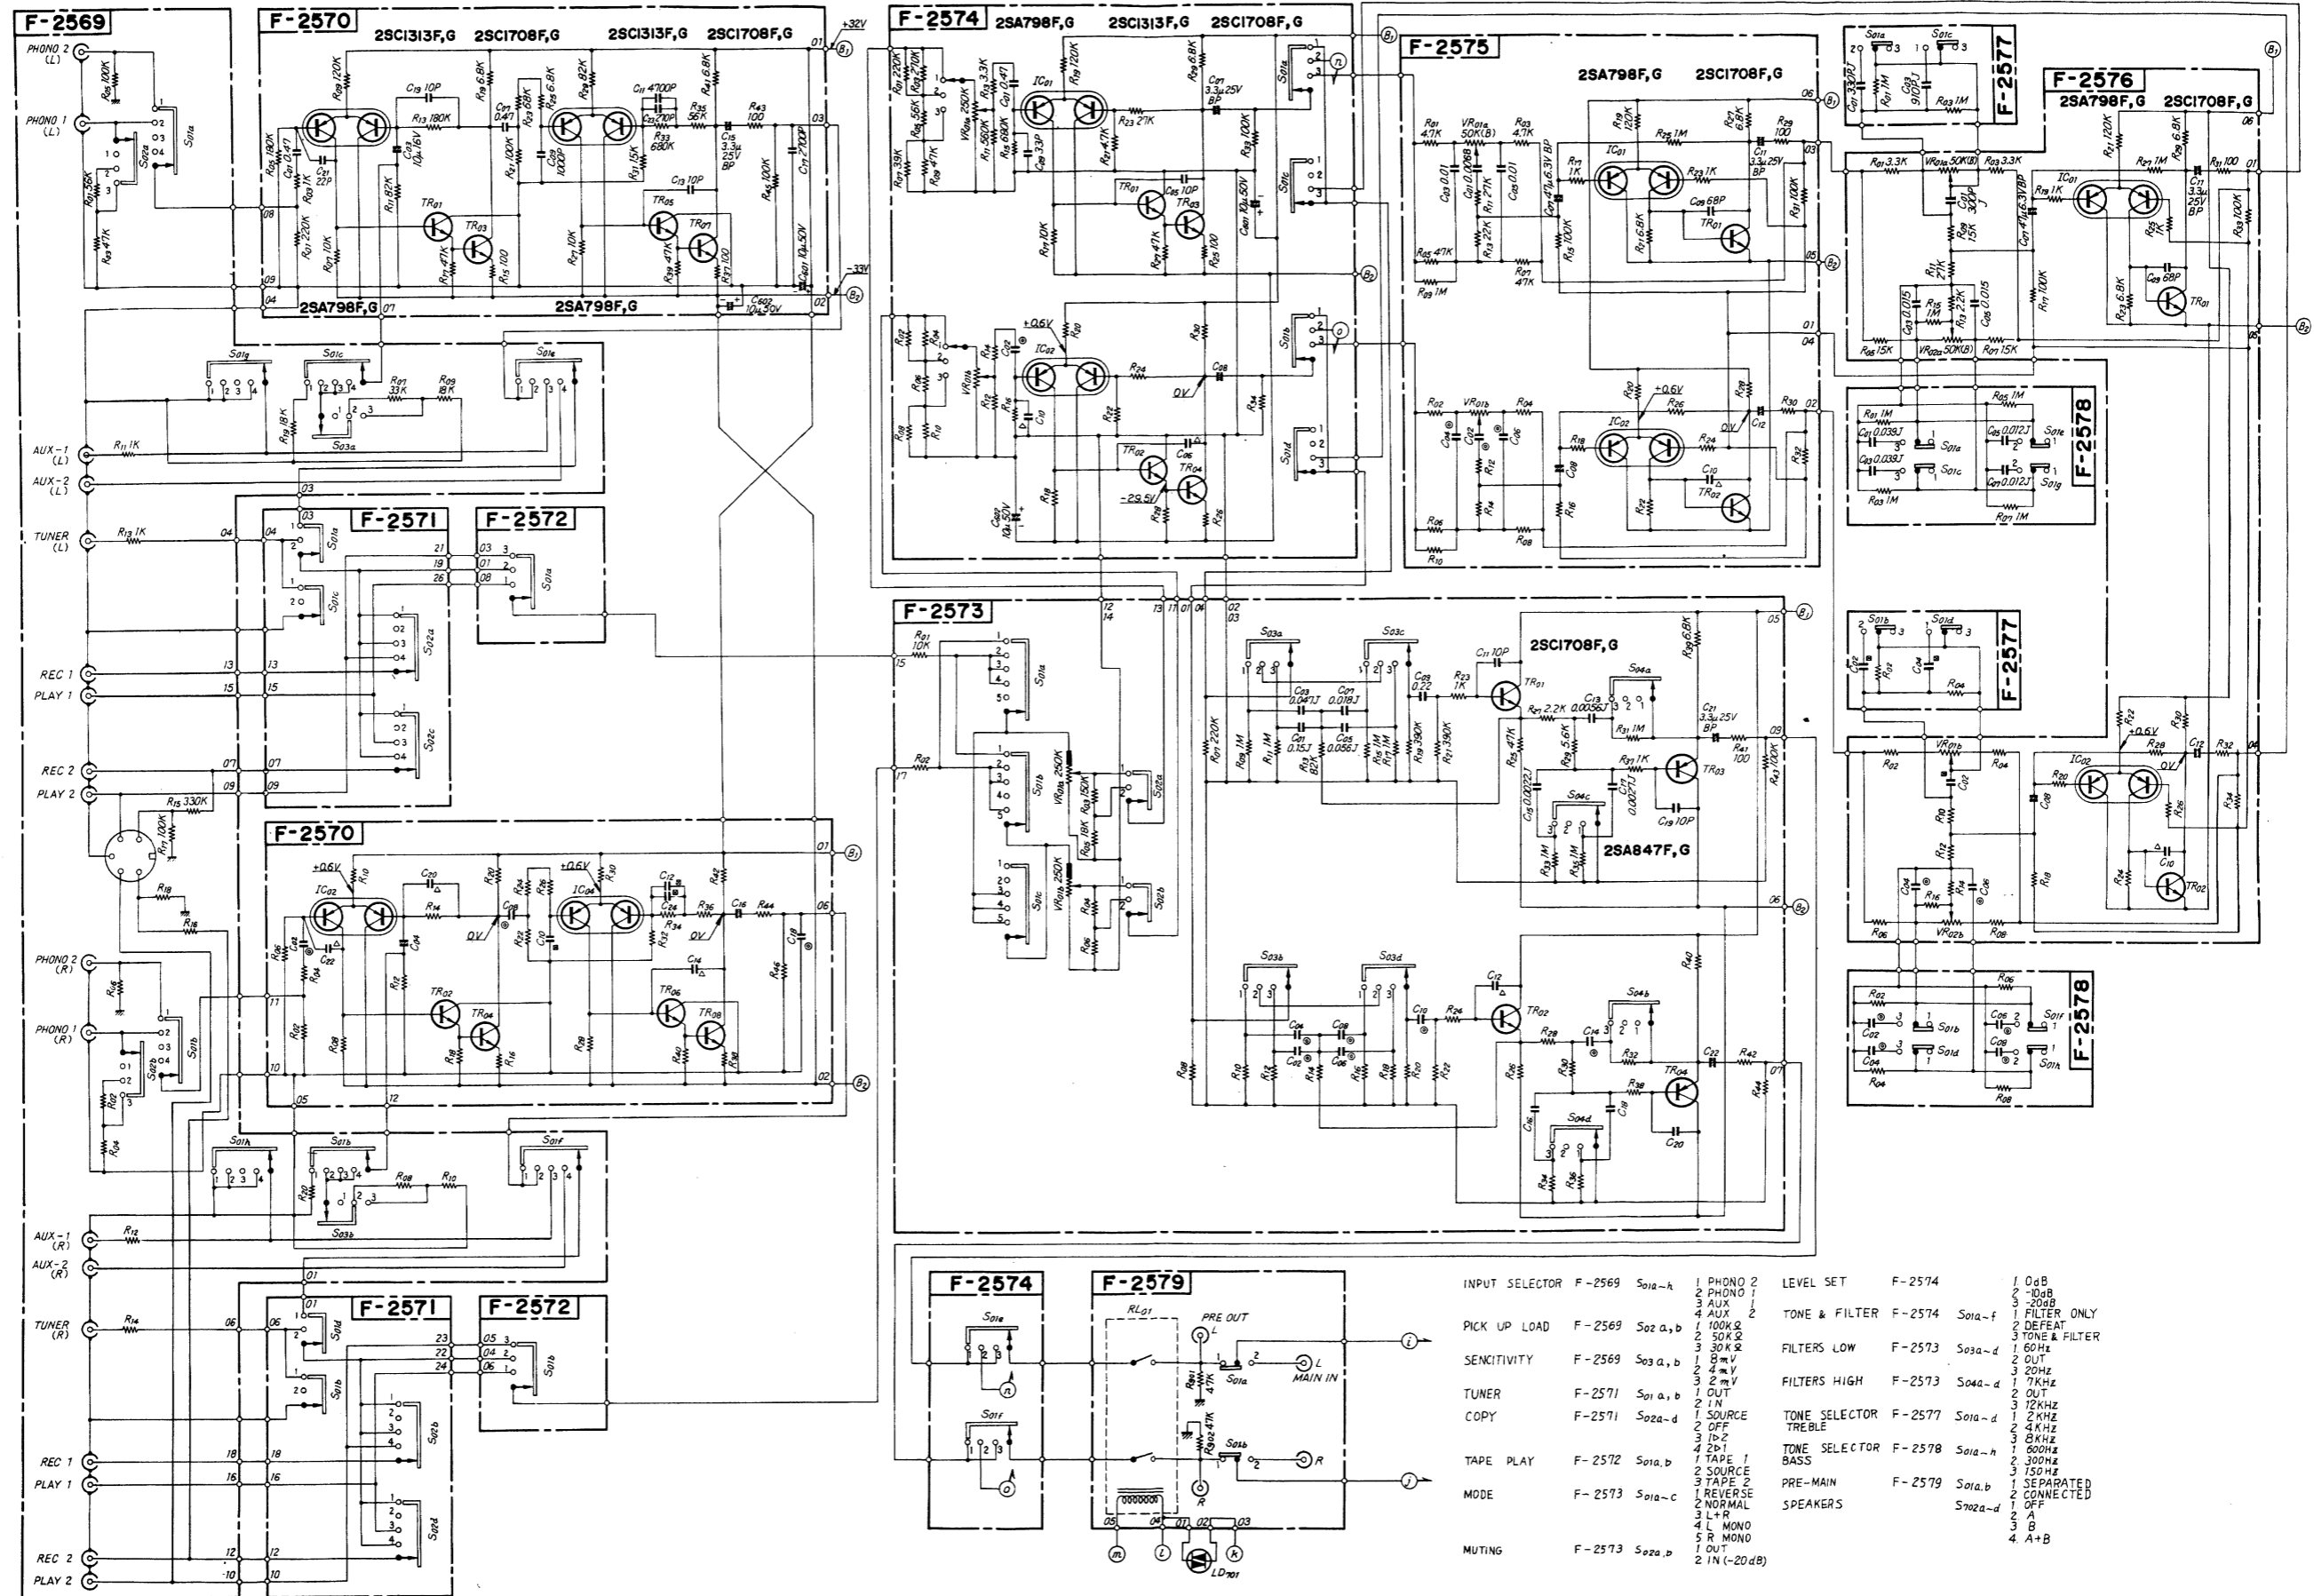


INPUT SELECTOR	F-2569	So1a-h	1 PHONO 2 2 PHONO 1 3 AUX 1 4 AUX 2	LEVEL SET	F-2574	1 0dB 2 +20dB 3 -20dB
PICK UP LOAD	F-2569	So2 a, b	1 100K Ω 2 50K Ω 3 30K Ω	TOPE & FILTER	F-2574	1 FILTER ONLY 2 DEFEAT 3 TONE & FILTER
SENSITIVITY	F-2569	So3 a, b	1 9mV 2 5mV 3 10mV	FILTERS LOW	F-2573	So3a-d
TUNER	F-2571	So1 a, b	1 OUT 2 IN	FILTERS HIGH	F-2573	So4a-d
COPY	F-2571	So2a-d	1 SOURCE 2 TAPE 1 3 TAPE 2	TOPE SELECTOR	F-2577	So1a-d
TAPE PLAY	F-2572	So1a, b	1 REVERSE 2 NORMAL	TREBLE	F-2577	So1a-d
MODE	F-2573	So1a-c	1 MONO 2 MONO 3 L+R	TONE SELECTOR	F-2578	So1a-h
MUTING	F-2573	So2a, b	1 OUT 2 IN (-20dB)	BASS	F-2578	So1a-h
				PRE-MAIN	F-2579	So1a, b
				SPEAKERS	F-2579	So2a-d
						1 SEPARATED 2 CONNECTED 3 OFF 4 A+B

6-2. AU-990 Power AMP. Section

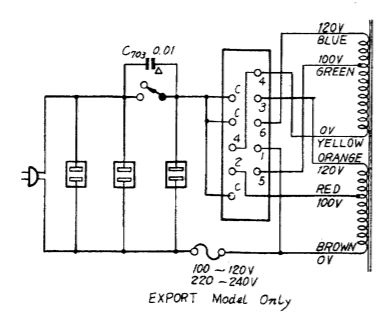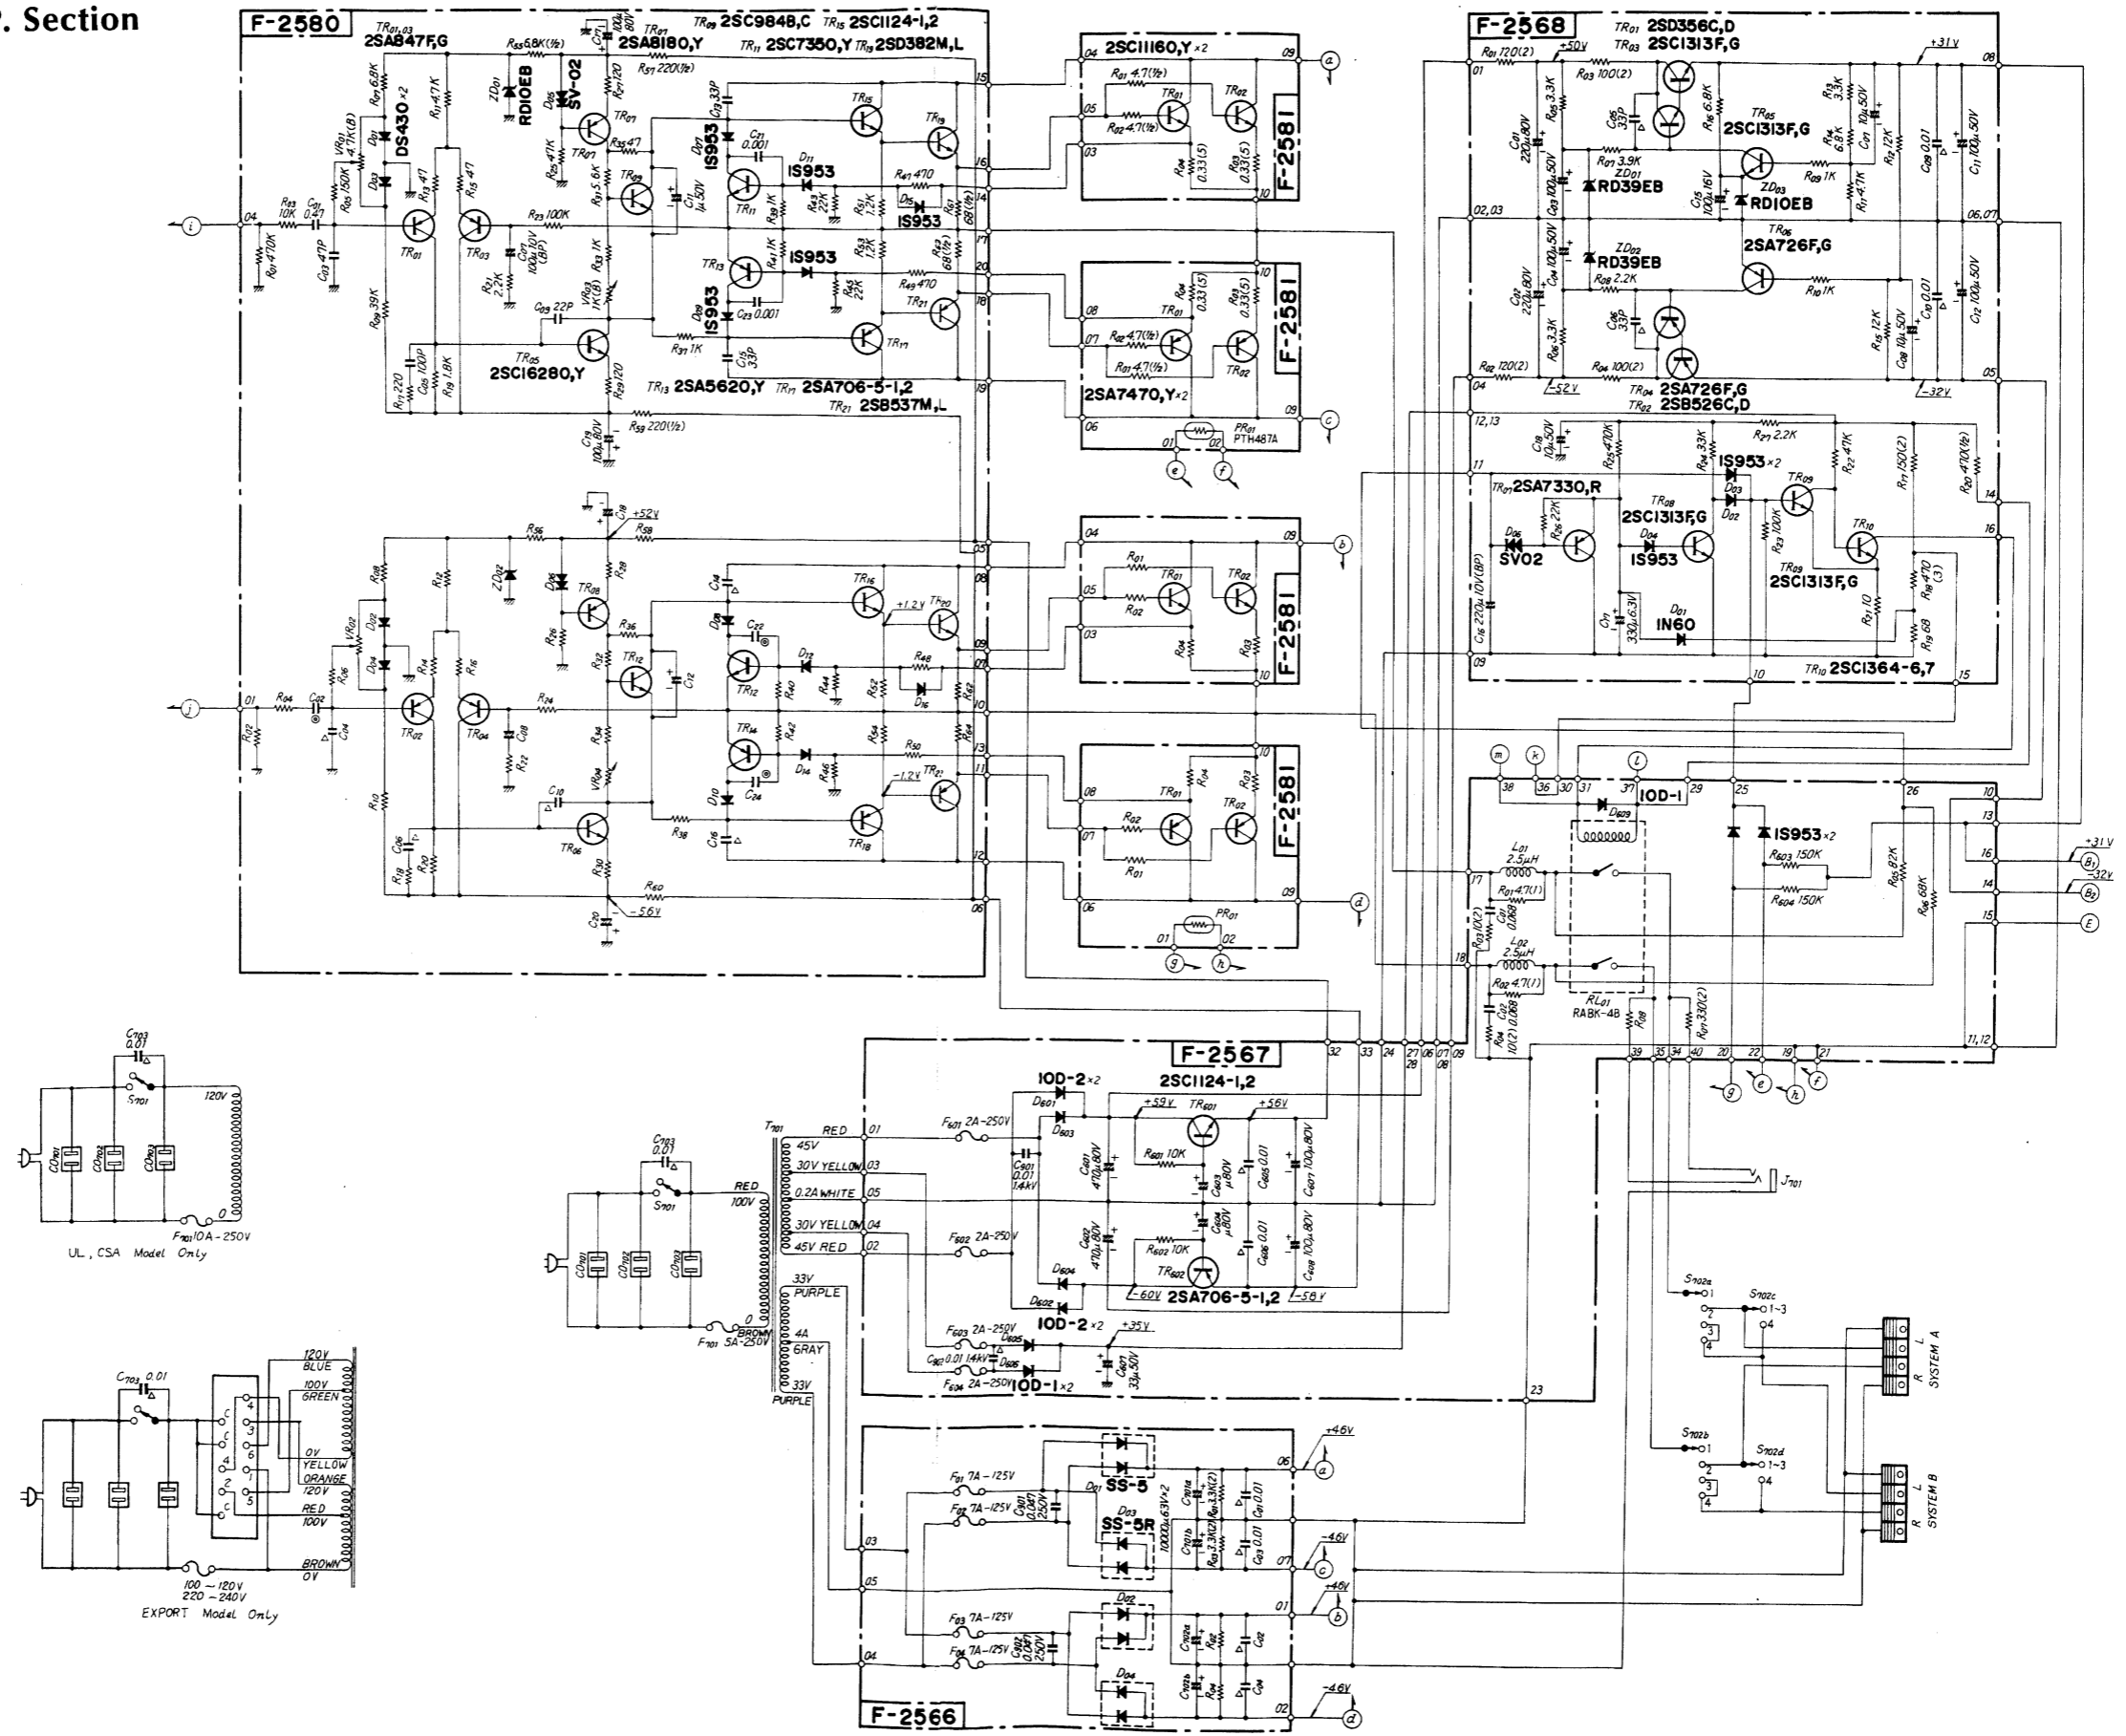




6-3. AU-11000 Pre AMP. Section

* La présentation et les spécifications sont susceptibles d'être modifiées sans préavis par suite d'améliorations éventuelles.
 * Änderungen, die dem technischen Fortschritt dienen, bleiben vorbehalten.
 * Design and specification subject to change without notice for improvements.

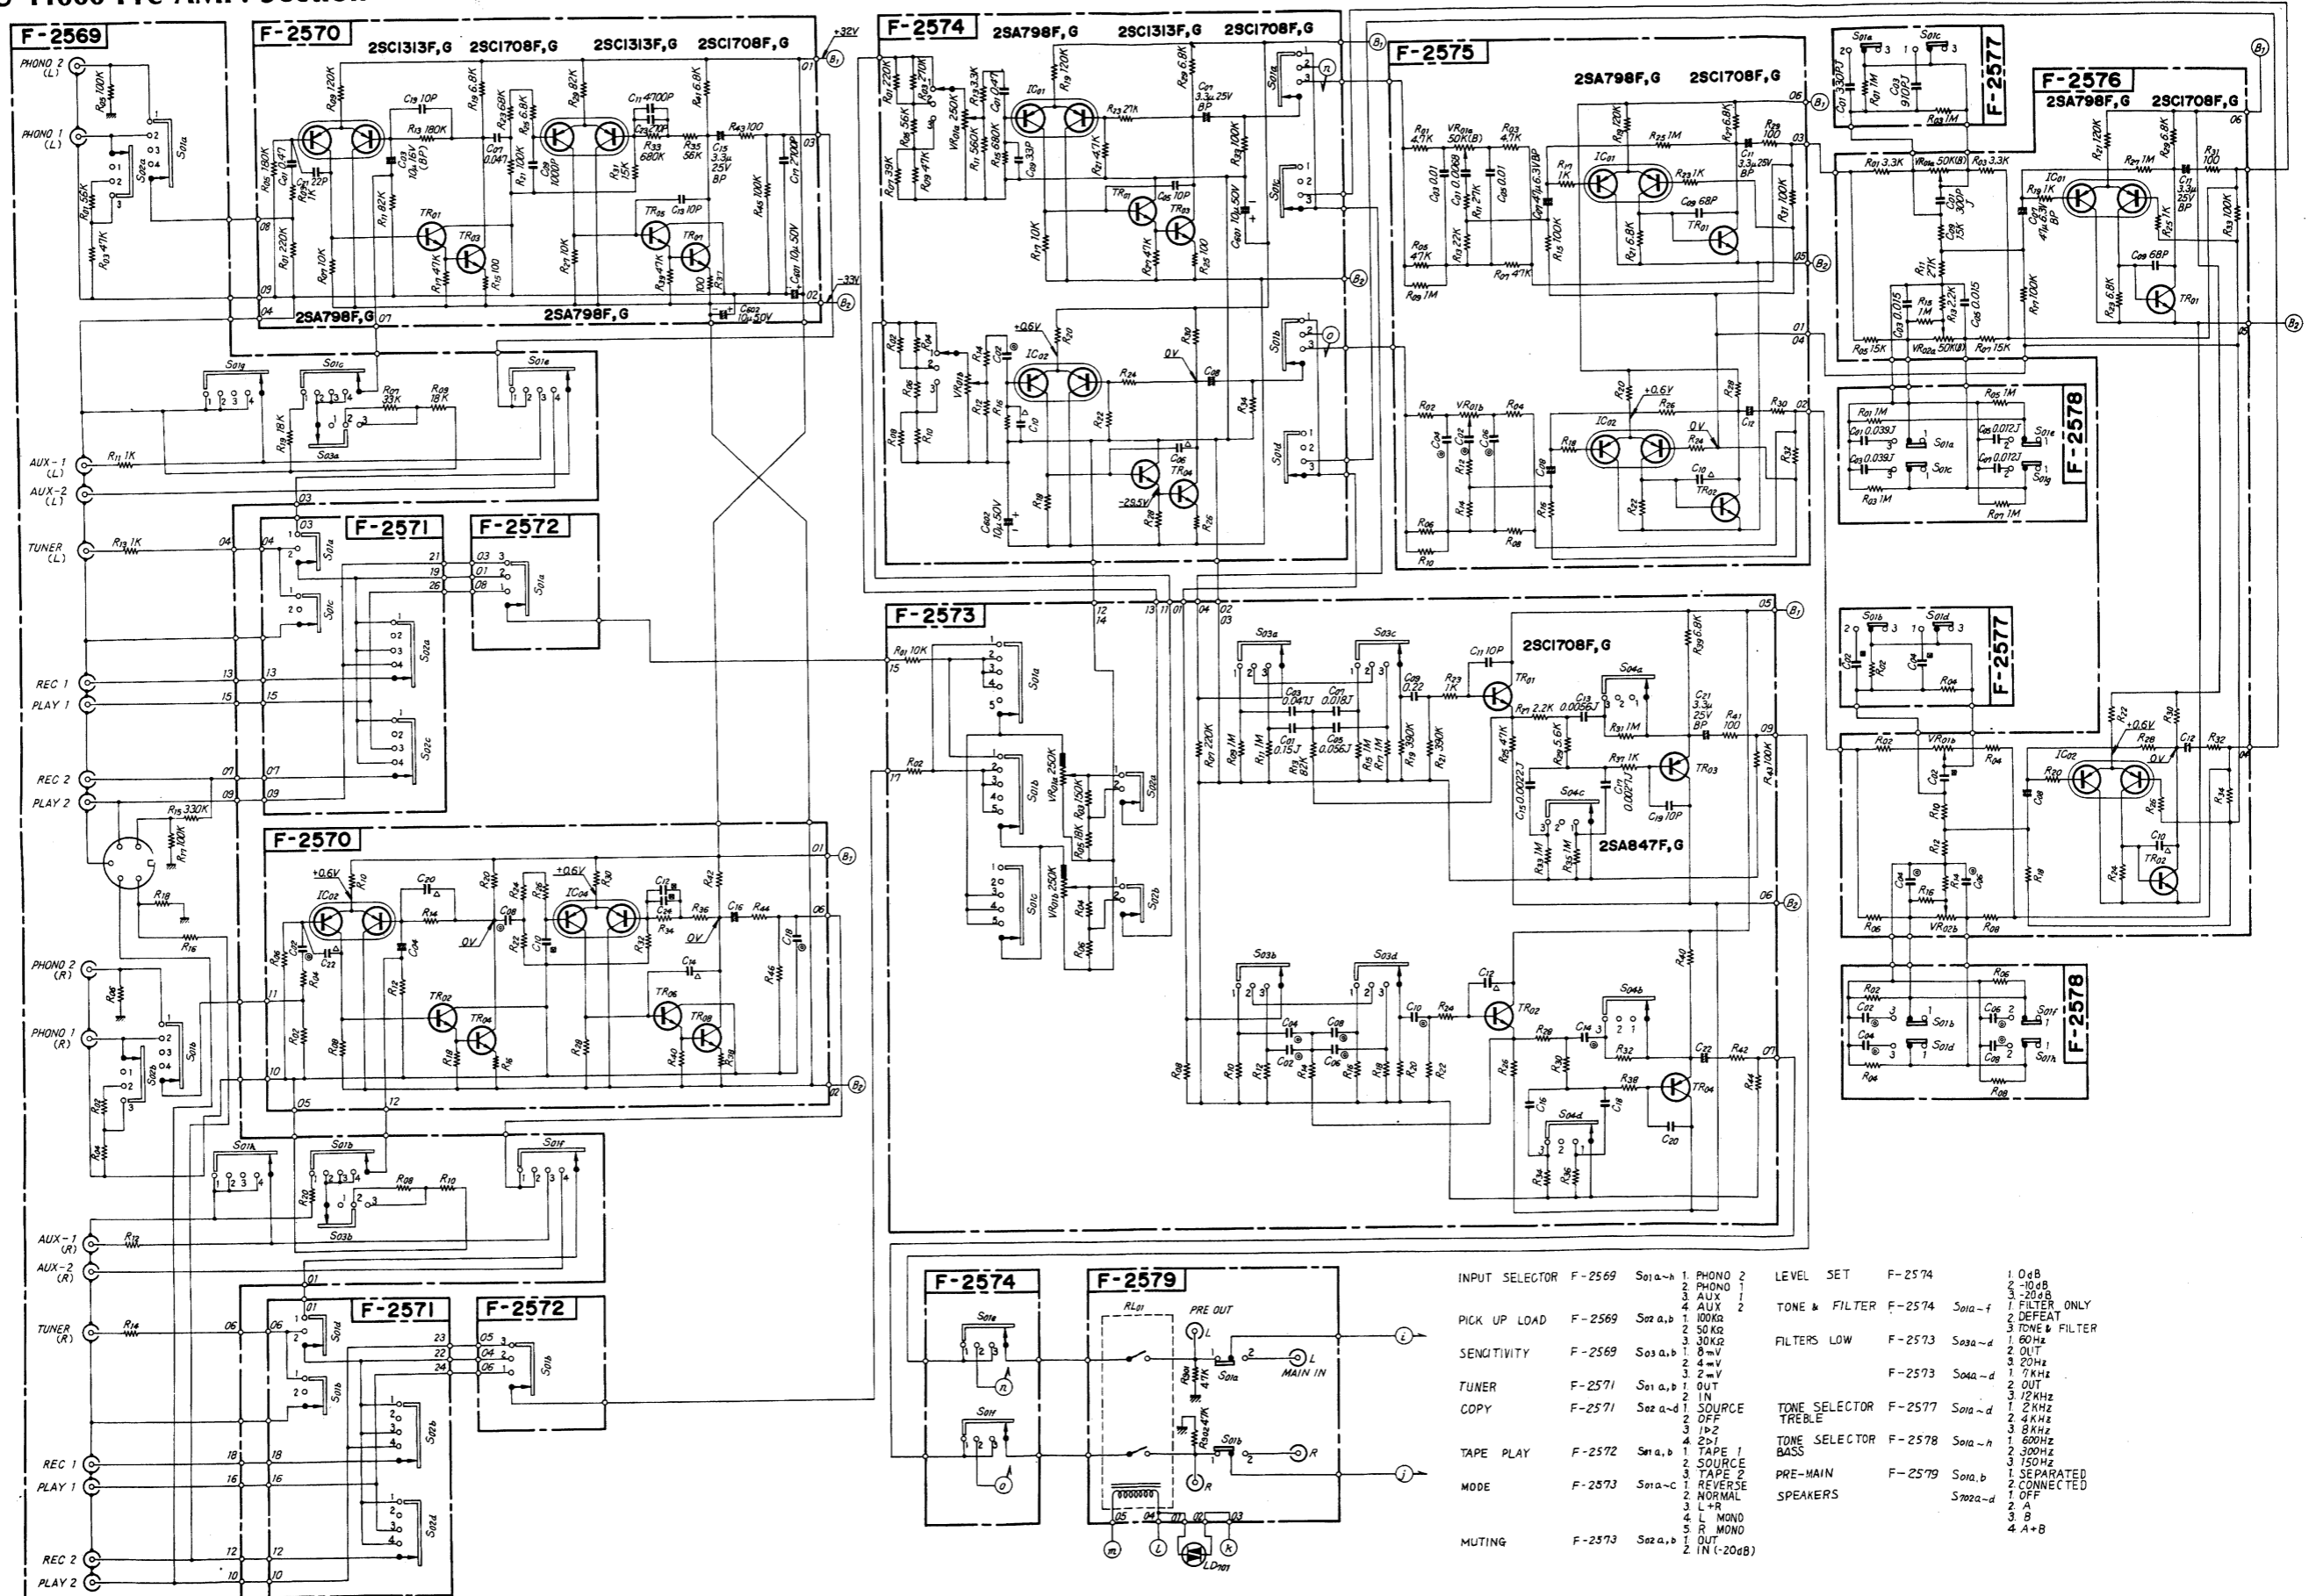


6-4. AU-11000 Power AMP. Section

* La présentation et les spécifications sont susceptibles d'être modifiées sans préavis par suite d'améliorations éventuelles.
 * Änderungen, die dem technischen Fortschritt dienen, bleiben vorbehalten.
 * Design and specification subject to change without notice for improvements.

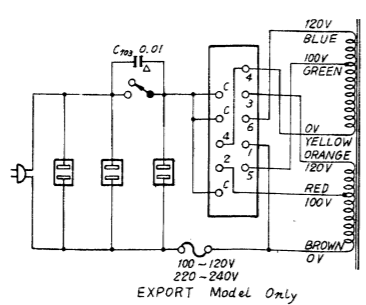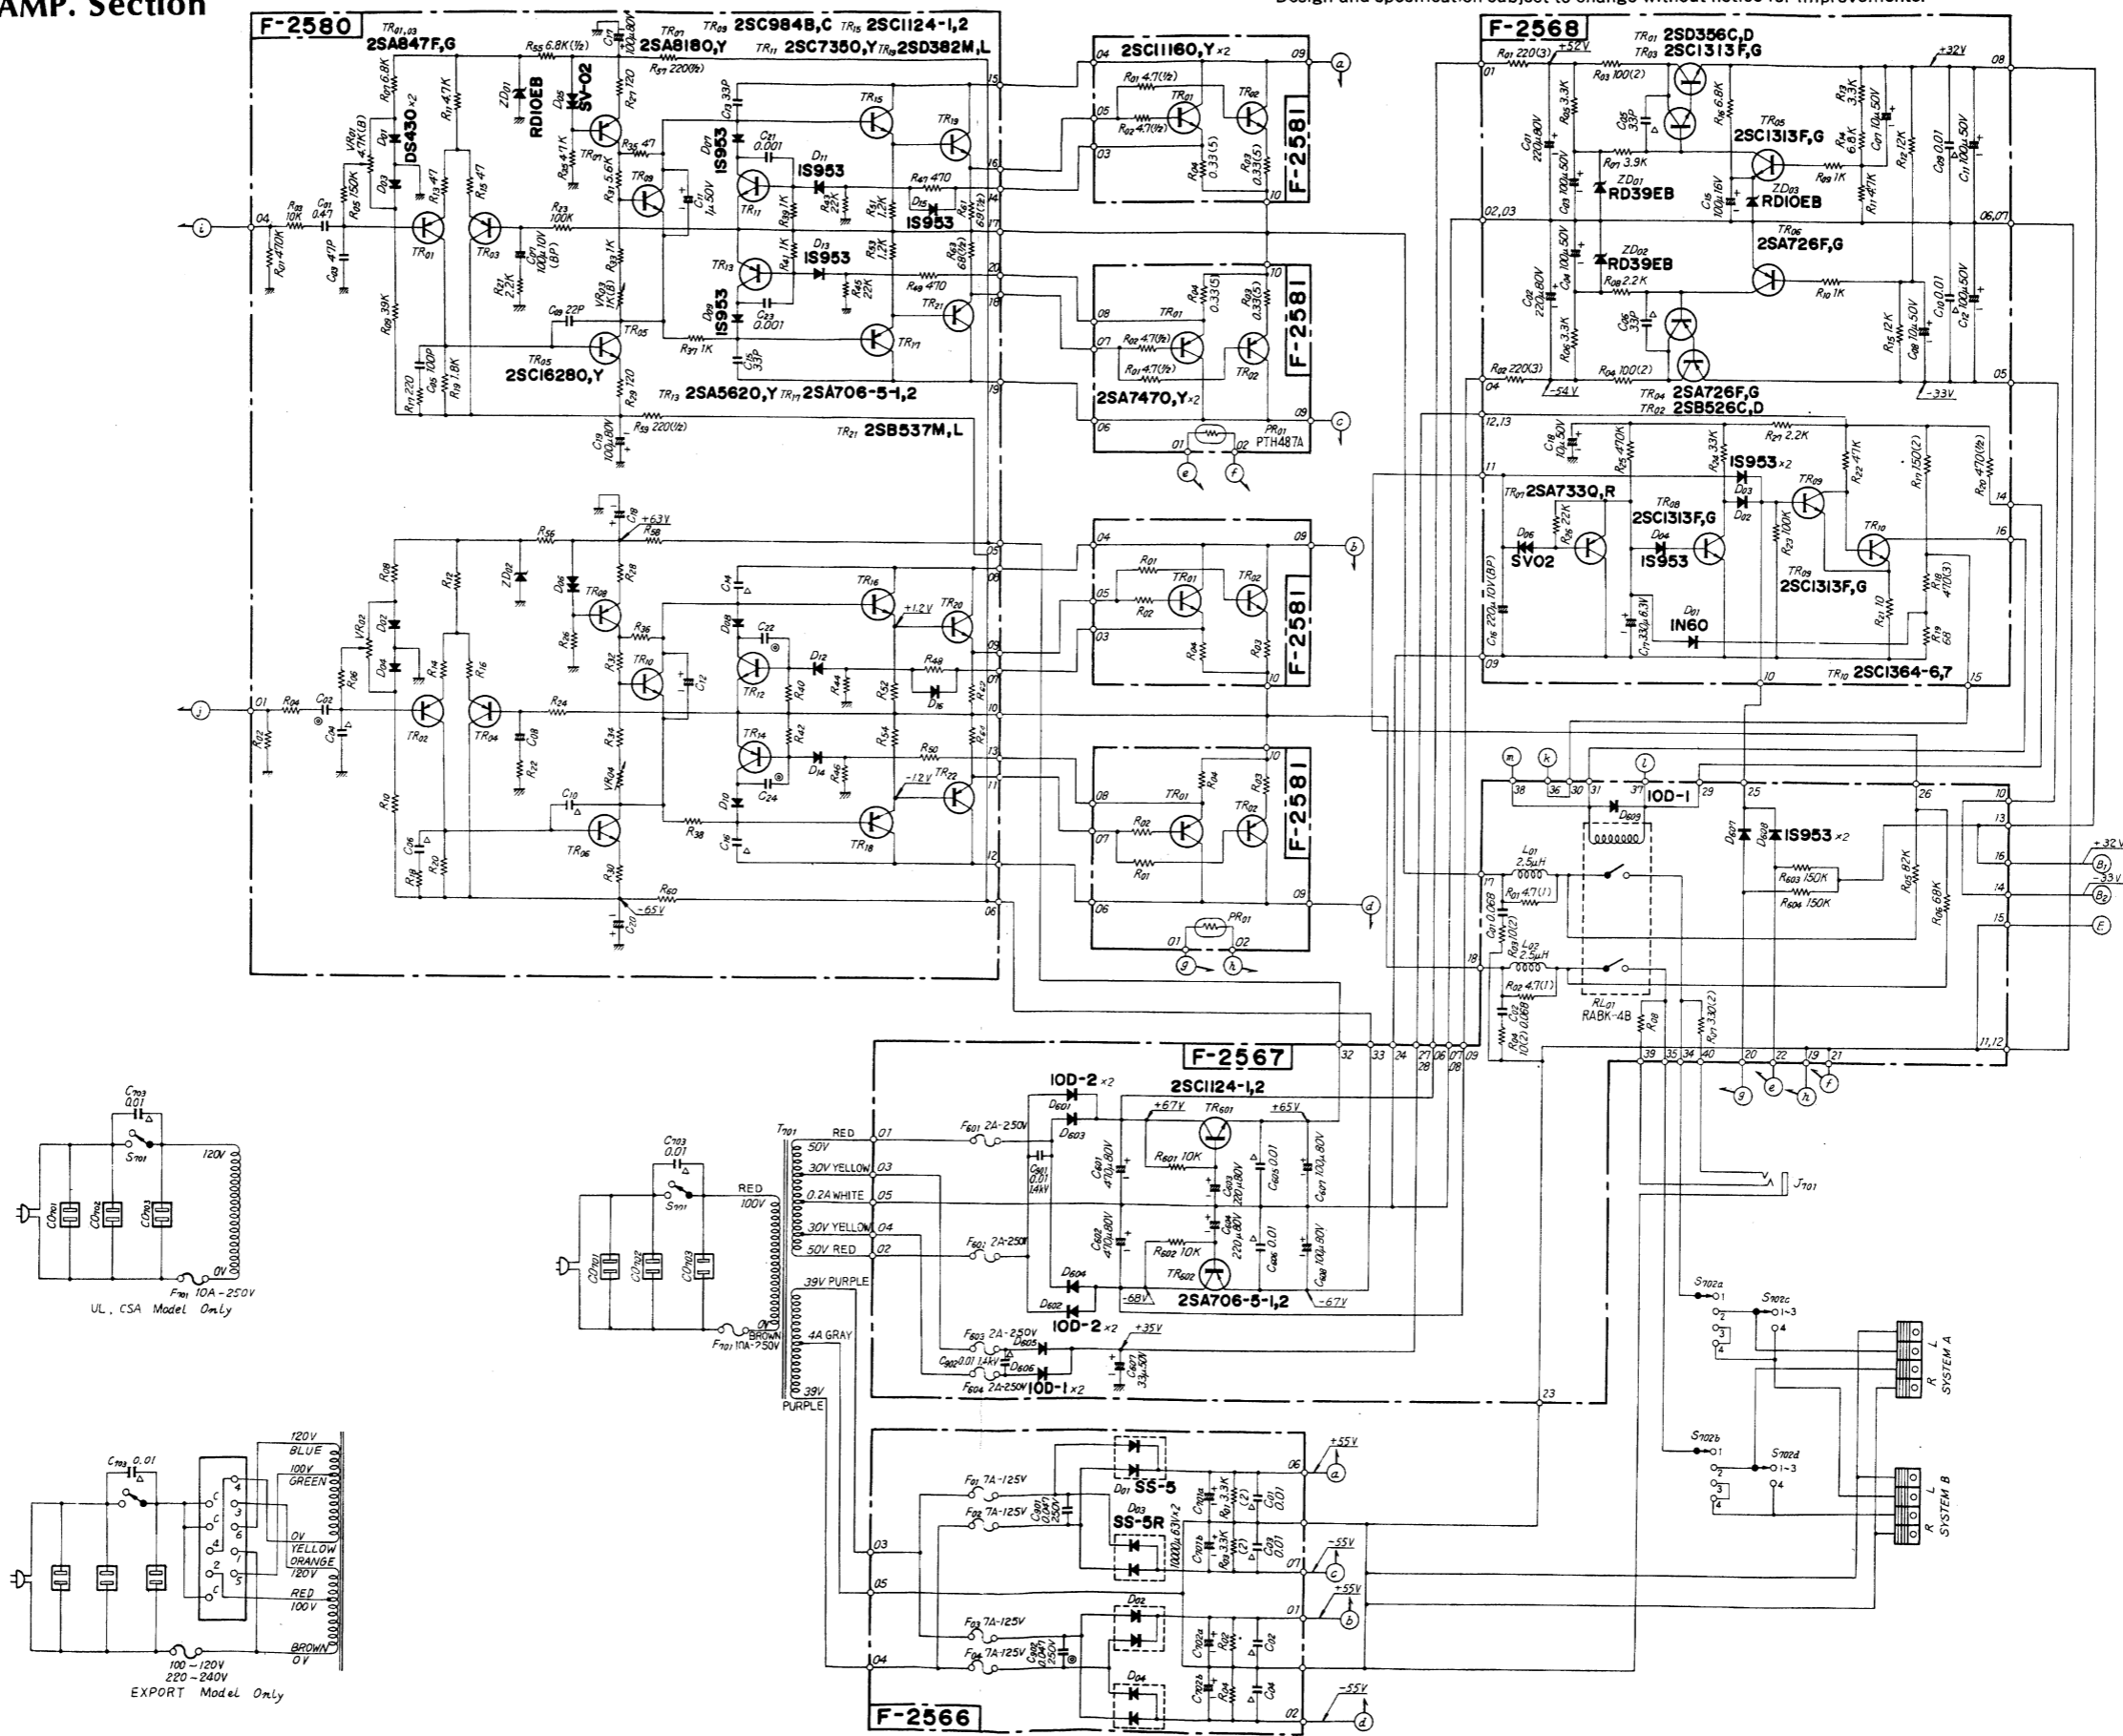


6-5. F-2582, F-2583

* Power supply circuit board either F-2567 or F-2582 is used and driver amplifier either F-2580 or F-2583 is used in this model.

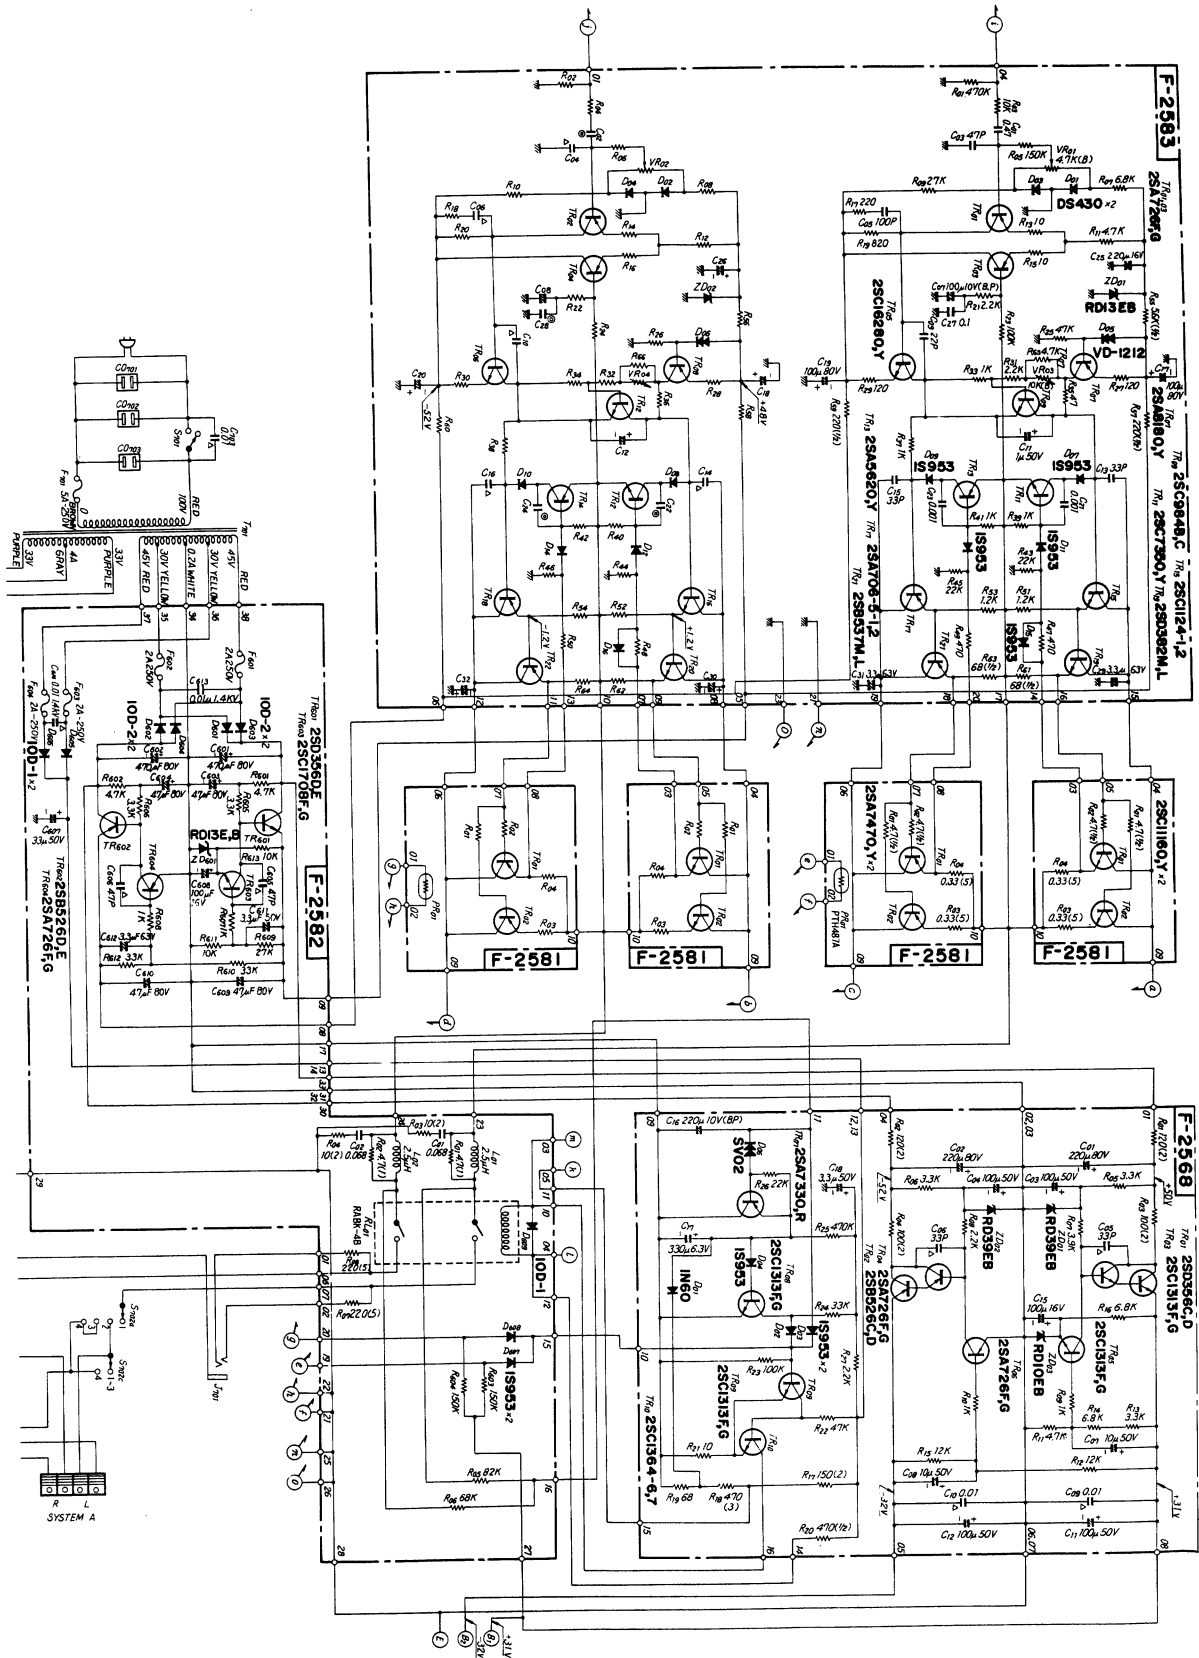

7. PACKING LIST

Parts No.	Stock No.	Description
1	9116051	Vinyl Cover
2	9027910	Stylofoam Packing
3	9009040	Carton Case (AU-9900)
	9009070	Carton Case (AU-11000)
4	5996080	Curl Stopper

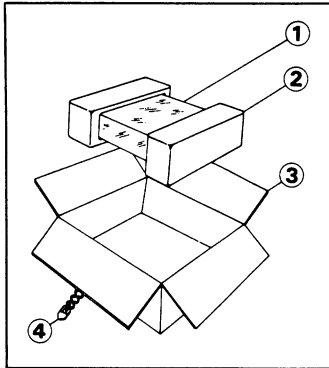

8. ACCESSORY PARTS LIST

Parts No.	Stock No.	Description
	9209230	Operating Instructions (AU-9900)
	9209210	Operating Instructions (AU-11000)
	2410560	Short Pin Plug
	9237010	Schematic Diagram (AU-11000)
	9237020	Schematic Diagram (AU-9900)



SANSUI ELECTRIC CO., LTD.
14-1, 2-chome, Izumi, Suginamiku, Tokyo 168, Japan.
TELEPHONE: (03) 323-1111 / TELEX: 232-2076